



Proudly made in the U.S.A. by

TRI-TRONICS®



Mark•Eye™ SETUP INSTRUCTIONS

Optimized for the Detection of Registration Marks on Translucent or Transparent Web Materials

Web color/background is Lighter than the mark (See Figure A)

Position the detection zone of the sensor between the registration marks and press the “LIGHTER THAN MARK” button to initiate the AUTOSET™ routine.

The green LED AUTOSET indicator will rapidly blink until the proper setting is achieved. The red LED output indicator and output transistors will turn “OFF”. When the mark passes through the detection zone, the red LED output indicator and output transistors will turn “ON” for the duration of time that the mark is in view.

NOTE: Detection of a Dark colored mark on a light colored background is impossible if the light source can not penetrate through the light colored background. If this condition occurs during a light colored background AUTOSET routine, both the red and green LEDs will flash twice.

Web color/background is Darker than the mark (See Figure B)

Position the detection zone of the sensor between the registration marks and press the “DARKER THAN MARK” button to initiate the AUTOSET routine.

The green LED AUTOSET indicator will rapidly blink until the proper setting is achieved. The red LED output indicator and output transistors will turn “OFF”. When the mark passes through the detection zone, the red LED output indicator and output transistors will turn “ON” for the duration of time that the mark is in view.

Inverting the Output

Depress both buttons for 3 seconds.

Pulse Stretcher

The Markeye sensor can be programmed to provide a 15-millisecond pulse stretcher timing function. To determine if the pulse stretcher is enabled, during initial power-up the AUTOSET LED will rapidly flash twice, verifying that the pulse stretcher is enabled.

Enabling or Disabling the Pulse Stretcher

To toggle the status of the pulse stretcher to the opposite state:

1. Remove power from the sensor.
2. Depress and hold both buttons simultaneously and apply power.
3. After applying power, note that the AUTOSET LED will flash; release both buttons.
4. Depress the “LIGHTER THAN MARK” to toggle the pulse stretcher to the opposite state.
5. Remove power from the sensor.
6. Whenever power is applied, the pulse stretcher will be enabled and the AUTOSET™ LED will flash twice. The pulse stretcher can be disabled when these steps are repeated.

NOTE: The factory’s default setting for the pulse stretcher is the disabled state.



Dark Mark on a Light Web (Figure A)



Light Mark on a Dark Web (Figure B)



Proudly made in the U.S.A. by

TRI-TRONICS®

TRI-TRONICS COMPANY, INC. • P.O. Box 25135, Tampa, FL 33622-5135 • 813.886.4000 VOICE • 800.237.0946 TOLL FREE • 813.884.8818 FAX

Web: ttco.com

SPECIFICATIONS



SUPPLY VOLTAGE	HYSTERESIS
<ul style="list-style-type: none"> • 10 to 30 VDC • Polarity Protected 	<ul style="list-style-type: none"> • Minimal hysteresis promotes detection of low contrast registration marks
CURRENT REQUIREMENTS	LIGHT IMMUNITY
<ul style="list-style-type: none"> • 45 milliamps (exclusive of load) 	<ul style="list-style-type: none"> • Responds to sensor's pulse modulated light source ... immune to most ambient light
OUTPUT TRANSISTORS	INDICATORS
<ul style="list-style-type: none"> • (1) NPN and (1) PNP output transistors • Sensor outputs can sink or source up to 150 milliamps (current limit) • All outputs are continuously short-circuit protected 	<ul style="list-style-type: none"> • Green AUTOSET LED flashes when AUTOSET routine is activated and stays illuminated when AUTOSET is completed • Red Output LED illuminates when sensor's output transistors are "ON" • On power-up, the AUTOSET LED flashes twice when the pulse stretcher is enabled
REMOTE AUTOSET INPUT	AMBIENT TEMPERATURE
<ul style="list-style-type: none"> • Opto isolated momentary sinking input (10 milliamps) 	<ul style="list-style-type: none"> • -40°C to 70°C (-40°F to 158°F)
RESPONSE TIME	RUGGED CONSTRUCTION
<ul style="list-style-type: none"> • Light state response = 100 microseconds • Dark state response = 100 microseconds 	<ul style="list-style-type: none"> • Chemical resistance to harsh cleaners, such as detergents, alcohols, and ketones • Waterproof ratings: NEMA 4 and IP66 • Conforms to heavy industry grade CE and UL requirements
LED LIGHT SOURCE	SELECTABLE PULSE STRETCHER
<ul style="list-style-type: none"> • Pulse modulated high intensity white LED 	<ul style="list-style-type: none"> • Provides a minimum of 10 milliseconds output duration
PUSHBUTTON CONTROL	
<ul style="list-style-type: none"> • One pushbutton set-up • Automatic set-up routines based on web opacity • Simultaneously pushing both buttons inverts the output • On power-up, simultaneously pushing both buttons enables the program mode, allowing the pulse stretcher to be enabled or disabled 	



Product subject to change without notice.


Sensor Selection Guide

Model	Description
MEWL	White LED, 5-conductor cable
MEWLC	White LED, 5-pin micro connector on a 6" pigtail

Cable Selection Guide (5 Wire)

Model	Micro Cable (M12) Description
GSEC-2MU	6.5 ft. (2.0m) Low Cost, Unshielded
GSEC-5MU	16 ft. (5.0m) Low Cost, Unshielded
GSEC-6	6 ft. (1.8m) Shielded Cable
GSEC-15	15 ft. (4.6m) Shielded Cable
GPSEC-15	15 ft. (4.6m) Shielded Cable

DIMENSIONS

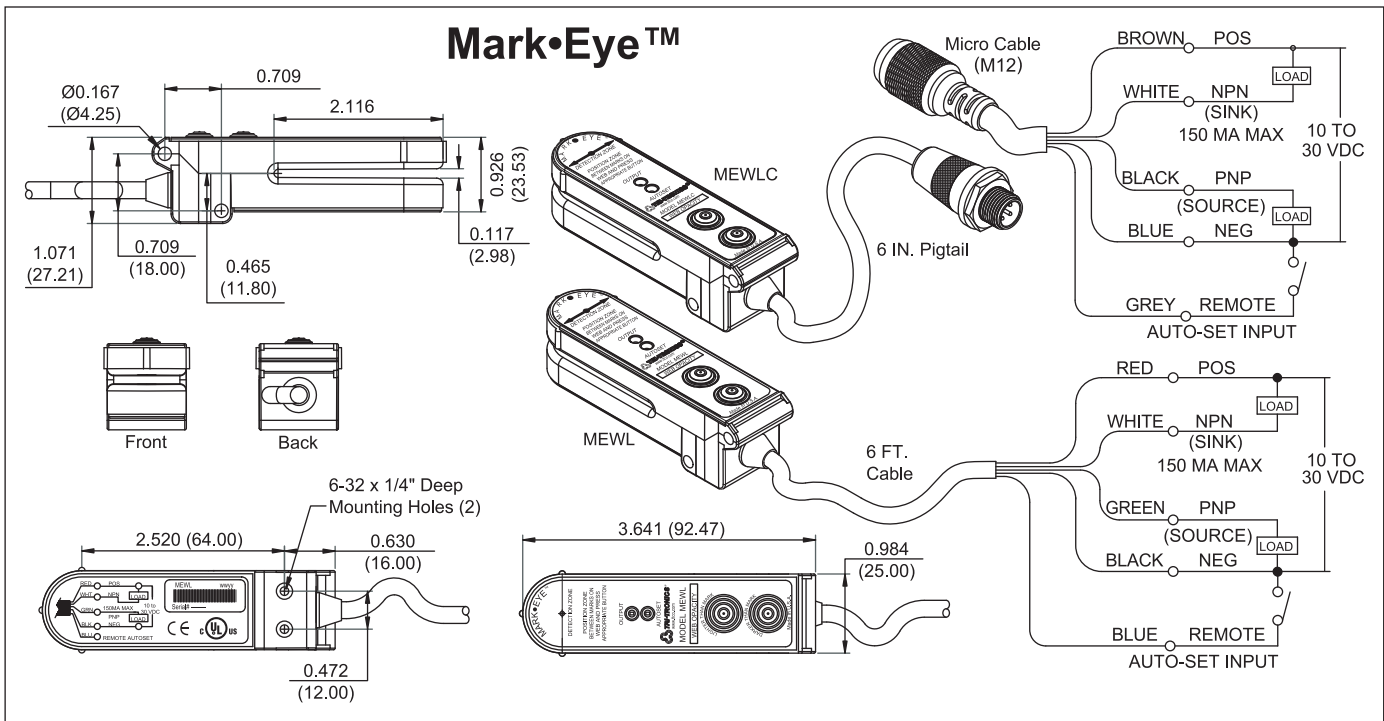

Proudly made in the U.S.A. by
TRI-TRONICS®

P.O. Box 25135, Tampa, FL 33622-5135
 TEL: (813) 886-4000 / TOLL FREE: (800) 237-0946
 FAX: (813) 884-8818 / TOLL FREE: (800) 375-8861
 www.ttco.com / info@ttco.com