

# KAFM-EMC

## EMC Strain Relief Plates



Type SF: Mounted on snap foot for DIN-rail shape H



Type SC: Mounted on screw-foot for DIN-rail shape C



Type SK: Mounted on screw-foot for DIN-rail shape H




Type DH: Mounted on bushing for flexible fixation on bottom sheet

## Product Description

The EMC strain relief plate KAFM is practical for grounding interferences on the cable shield.

The cable assembly can be assembled on a mounting plate with screws, with SC-feet on DIN-rails shape C or with SF-feet on 35 mm DIN-rails shape H.

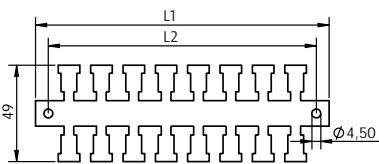

4.1

## Specifications

Material **Stainless steel**



SC-foot with twist protection notch: space-saving design enables high cable density.

Mounting foot adjusts itself when tightening the screw.

**NEW**

Type	Order No. Type SF	Order No. Type SK	Order No. Type SC	Order No. Type DH	Order No. loose rail	Length L1	Length L2	No. of teeth
KAFM 2	36442	36432	36412	36482	36422	50.5 1.988 "	37.5 1.476 "	2
KAFM 4	36444	36434	36414	36484	36424	83.5 3.287 "	70.5 2.776 "	4
KAFM 6	36446	36436	36416	36486	36426	116.5 4.587 "	103.5 4.075 "	6
KAFM 8	36448	36438	36418	36488	36428	149.5 5.886 "	136.5 5.374 "	8
KAFM 10	36450	36440	36400	36490	36430	182.5 7.185 "	169.5 6.673 "	10
KAFM 16	36452	36470	36465	36460	36530	281.5 11.083 "	268.5 10.571 "	16
KAFM 29	36454	36471	36466	36462	36540	494.5 19.469 "	481.5 18.957 "	29
KAFM 59	36458	36472	36467	36464	36550	990 38.976 "	978 38.054 "	59
KAFM 59 zinc plated	36459	-	-	-	36562	990 38.976 "	978 38.054 "	59
SF	36230	Snap foot loose, for 35 mm DIN-rail shape H						
SK	36232	Screw-foot loose, for 35 mm DIN-rail shape H						
SC*	36231	<b>NEW</b>	Screw-foot loose, for 30 mm DIN-rail shape C (width of mouth: 16 mm) with twist protection notch					
Bushing	36234	Distance bushing 8 mm high						
Screw	99017	M4 × 16 DIN 912						

\*New type available from November 2018