


- Shunt is used to measure DC current
- 1.0 Class
- 2kV-1min Withstanding Voltage
- 50.0mV or 60.0mV Voltage Drop
- 10MΩ Insulation Resistance

# KBP Series

Shunt

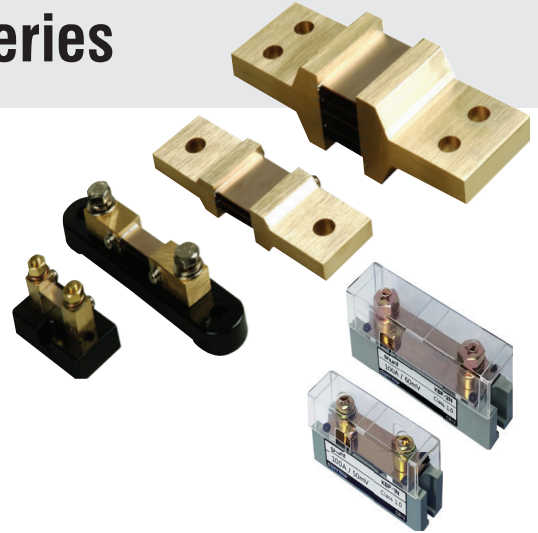

## Ordering Information

KBP – 1  
①

① Current	<b>1</b>	1~75A
	<b>2</b>	100~300A
	<b>1N</b>	400~1000A
	<b>2N</b>	1500A~2000A
	<b>3</b>	2500~3000A
	<b>4</b>	1~75A
<b>5</b>	60~15A	

Type	Primary(A)	Weight(g)	Dimensions(mm)						
1	1~75	100							
2	100~300	300	<table border="1" style="float: right;"> <tr> <td></td> <td>100A</td> <td>150~300A</td> </tr> <tr> <td>A</td> <td>35</td> <td>37</td> </tr> </table>		100A	150~300A	A	35	37
	100A	150~300A							
A	35	37							
1N	1~50	50							
2N	60~150	90							
3	400	300							
	500	600							
	600	600							
	750	1800							
	1000	2100							
4	1500	2500							
	2000	3500							
5	2500	5800							
	3000	7000							