



KEL-EMC-PF

Grounding Mount, Bracket Version

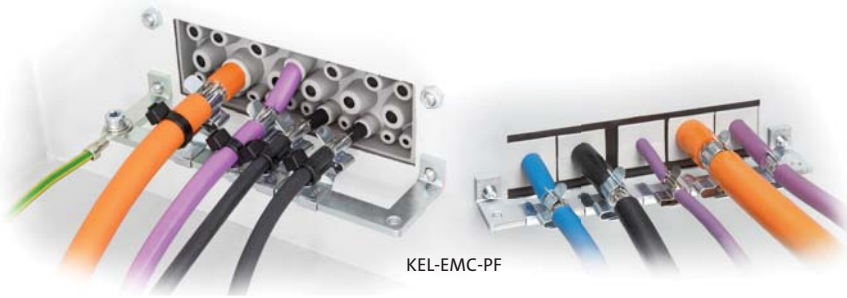

KEL-EMC-PF



KEL-EMC-PFM



Product Description

The EMC bracket combined with the matching PFS|SKL EMC shield clamp is perfect in conjunction with the KEL cable entry frame for alleviating interferences due to shields.

The EMC bracket is assembled inside the control panel. For this process the same fixing screws for the assembly of the KEL frame on the control panel are used. A female screw thread M5 is already integrated in the KEL-EMC-PF(M) bracket.

Depending on the cable diameter, the corresponding PFS|SKL EMC shield clamp can be snapped onto the EMC bracket.

Advantages & Benefits

- Supports a wide range of cable and wire sizes
- Large surface contact of the cable shield
- Permanent spring pressure on the cable shield
- Fast and easy assembly

Specifications

Material **Carbon steel, galvanically zinc plated**

Compatible with

KEL-U Cable entry frames	8 - 14
KEL-ER Cable entry frames	9 - 14
KEL Cable entry frames	18 - 21
KEL 183 Cable entry frames	34
KEL-QUICK Cable entry frames	56 - 57
KEL-BES Brush frames	68
KEL-DPU Cable entry plates	76 - 77
KEL-DPZ Cable entry plates	78 - 84
PFSZ SKL / PFSZ-M MSKL Shield clamps	114
PFS SKL Shield clamps	115

Type	Fits with	Order No.	Length L1	Length L2	PU
KEL-EMC-PFM 10	KEL(-U) 10 x KEL-QUICK 10 x KEL-ER 10 x	39184	93 mm 3.661 "	83 mm 3.268 "	1
KEL-EMC-PFM 16	KEL(-U) 16 x KEL-QUICK 16 x KEL-ER 16 x	39183	113 mm 4.449 "	103 mm 4.055 "	1
KEL-EMC-PFM 24	KEL(-U) 24 x KEL-QUICK 24 x KEL-ER 24 x KEL-DPZ 24 x	39181	140 mm 5.512 "	130 mm 5.119 "	1
KEL-EMC-PF B4	KEL(-ER)-E2 KEL-QUICK-E2 KEL(-U)-B KEL-QUICK-B KEL-ER-B	39150	68 mm 2.677 "	58 mm 2.283 "	1
KEL-EMC-PF 10	KEL(-ER)-E3 KEL-QUICK-E3 KEL(-U) 10 x KEL-QUICK 10 x KEL-ER 10 x	39160	93 mm 3.661 "	83 mm 3.268 "	1
KEL-EMC-PF 16	KEL(-ER)-E4 KEL-QUICK-E4 KEL(-U) 16 x KEL-QUICK 16 x KEL-ER 16 x	39170	113 mm 4.449 "	103 mm 4.055 "	1
KEL-EMC-PF 24	KEL(-ER)-E5 KEL-QUICK-E5 KEL(-U) 24 x KEL-QUICK 24 x KEL-ER 24 x KEL-DPZ 24 x KEL-DPZ-E	39180	140 mm 5.512 "	130 mm 5.119 "	1
KEL-EMC-PF 183	KEL 183 KEL 183-E	39190	200 mm 7.874 "	95 / 190 mm 3.74 / 7.48 "	1