


KEL-FG-A

Flange Enclosures for Cable Entry



Slit KT grommets

Product Description

The cable entry frames KEL-FG-A are suited for installation, sealing and strain relief of cables with connectors and conduits at an angle of 90° to the panel, enclosure or machine wall. The KEL-FG-A frame matches exactly the cut-out dimensions for 24-pin standard industrial connectors. A flat rubber gasket is included in the shipment.

Advantages & Benefits

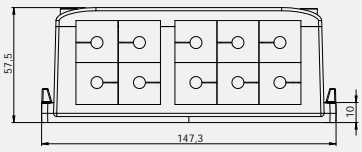
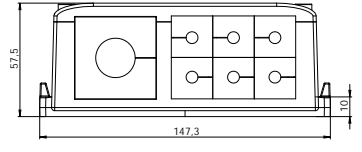
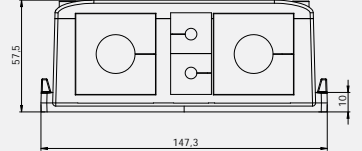
- Installation at an angle of 90° to the wall
- Mechanical protection of cable directly at the place of entry
- Protection against water spray and drips
- Warranty on pre-terminated cables remains
- Strain relief according to EN 62444
- High stability, vibration resistant

Specifications

Material	Polyamide (PA)
Flame class	UL94-V0
IP Rating	IP54, with gasket and correct selection of the cable grommets
Operating temperature	- 40°C to + 140°C (static) - 40°F to + 284°F (static)
Properties	Halogen-free, silicone-free
Cut-out dimensions	36 × 112 mm / 1.378 × 4.409", Page 218 - 219

Accessories

Cable grommets	48 - 52
KEL-SNAP Mounting frames	31
KEL-EMC Grounding mounts	138 - 140
ST Plugs	53

Description	Type	Order No.	Grommets small large	PU
	KEL-FG-A10	42320	10 -	1
	KEL-FG-A10 with V2A screws	42320.200	10 -	1
	KEL-FG-A7	42322	6 1	1
	KEL-FG-A7 with V2A screws	42322.200	6 1	1
	KEL-FG-A4	42324	2 2	1
	KEL-FG-A4 with V2A screws	42324.200	2 2	1

