


KT

Grommets, small, single

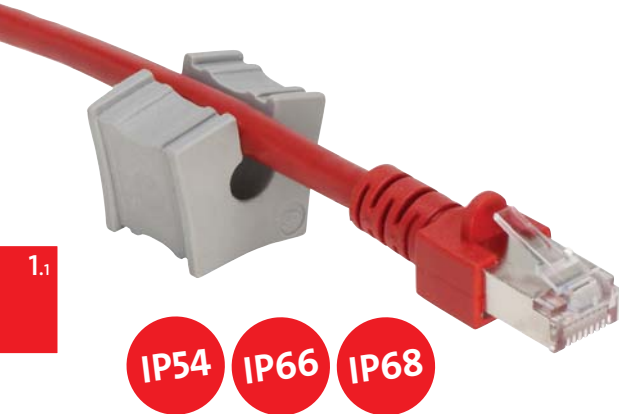

Product Description

Cable grommets KT small are used with the cable entry frames & cord grips of product groups 1.11 & 1.12.

The model range KT small is designed for cable diameters from 1 to 17 mm.

Assembly Note

When installing the grommets, the flat side should be facing the middle of the frame. This allows the flat sides of adjacent grommets to match up and provide a secure seal.

Pressure Compensation Element PCE 12

Pressure compensation element PCE 12 to avoid water condensation in highly sealed enclosures. For use in cable grommets KT 12 in combination with cable entry frames KEL-ER or cord grips KVT-ER.



Description	Type	Order No gray	Order No black	Clamping range	PU
	BTK	41251	41351	Blank grommet	10
BTK	KT 1	39941	39943	1 - 2 mm / 0.039 - 0.079 "	10
	KT 2	39934	41302	2 - 3 mm / 0.079 - 0.118 "	10
	KT 3	41203	41303	3 - 4 mm / 0.118 - 0.157 "	10
	KT 4	41204	41304	4 - 5 mm / 0.157 - 0.197 "	10
	KT 5	41205	41305	5 - 6 mm / 0.197 - 0.236 "	10
KT round	KT 6	41206	41306	6 - 7 mm / 0.236 - 0.276 "	10
	KT 7	41207	41307	7 - 8 mm / 0.276 - 0.315 "	10
	KT 8	41208	41308	8 - 9 mm / 0.315 - 0.354 "	10
	KT 9	41209	41309	9 - 10 mm / 0.354 - 0.394 "	10
	KT 10	41210	41310	10 - 11 mm / 0.394 - 0.433 "	10
	KT 11	41211	41311	11 - 12 mm / 0.433 - 0.472 "	10
	KT 12	41212	41312	12 - 13 mm / 0.472 - 0.511 "	10
	KT 13	41213	41313	13 - 14 mm / 0.511 - 0.551 "	10
	KT 14	41214	41314	14 - 15 mm / 0.551 - 0.591 "	10
	KT 15	41215	41315	15 - 16 mm / 0.591 - 0.63 "	10
	KTs 16	39901	39912	16 mm / 0.63 "	10
	KTs 17	39900	39913	17 mm / 0.669 "	10
Pressure compensation element PCE 12					
NEW	PCE 12 with KT 12	99192	99194	-	5
NEW	PCE 12	99190		-	5

*Only valid for gray product types



IP54




RoHS compliant

Made in Germany



KT Grommets, small, multi & Special Grommets

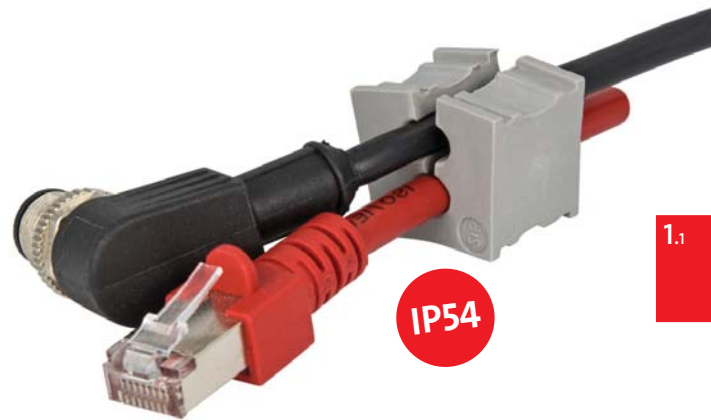

1.1

Description	Type	Order No gray	Order No black	Clamping range	PU
KT 2 x	KT 2 1	39942	39944	2× ø 1 mm / 0.003 "	10
	KT 2 2	39935	39936	2× ø 2 mm / 0.079 "	10
	KT 2 3	39939	39940	2× ø 3 mm / 0.118 "	10
	KT 2 4	39906	39907	2× ø 4 mm / 0.157 "	10
KT 4 x	KT 2 5	41200	39904	2× ø 5 mm / 0.197 "	10
	KT 2 6	41201	39905	2× ø 6 mm / 0.236 "	10
	KT 2 7	41202	39916	2× ø 7 mm / 0.276 "	10
	KT 2 8	39917	39918	2× ø 8 mm / 0.315 "	10
KT ASI2 rI	KT 4 2	39937	39938	4× ø 2 mm / 0.079 "	10
	KT 4 3	39914	39915	4× ø 3 mm / 0.118 "	10
	KT 4 4	39909	39911	4× ø 4 mm / 0.157 "	10
KT ASI2 II	KT 4 5	39908	39910	4× ø 5 mm / 0.197 "	10
	KT 4 6	39932	39933	4× ø 6 mm / 0.236 "	10
KT oval	KT-ASI	39902	39903	1 ASI-cable	10
	KT-ASI2 rI	39922	39924	2 ASI-cables	10
	KT-ASI2 II	39921	39923	2 ASI-cables	10
KT S1	KT oval	39930	-	approx. 8 × 4 mm / 0.315 x 0.157 "	10
	KT tele	39931	-		10
KT tele1	KT tele	39929	-	Telephone cable	10
KT tele2	KT tele1	41257	-	Data cable RJ12	10
	KT tele2	41258	-	Data cable RJ10 / RJ45	10

*Only valid for gray product types

Specifications KT gray

Material: Elastomer
 Flame class: UL94-Vo
 IP rating: KT round, single: up to IP66/IP68
 KT round, multi: IP54
 KT special, multi: IP54
 UL type rating: up to UL type 4X (acc. to UL 50E)
 Operating temperature: - 40°C to + 90°C (static)
 - 40°F to + 194°F (static)
 Properties: Halogen-free, silicone-free

Specifications KT black

Material: Elastomer
 Flame class: UL94-HB
 IP rating: KT round, single: up to IP66/IP68
 KT round, multi: IP54
 KT special, multi: IP54
 Operating temperature: - 30°C to + 90°C (static)
 - 22°F to + 194°F (static)
 Properties: Higher chemical resistance

Specifications PCE 12

Material: Polyamide 6
 Membrane: Polyacrylate
 IP rating: IP65
 Operating temperature: - 30°C to + 90°C (static)
 - 22°F to + 194°F (static)
 Air flow: ΔP = 1 psi, min. 50 l/h

Accessories

ST Plugs 53