


PCB|SKL

EMC Shield Clamps for Printed Circuit Boards

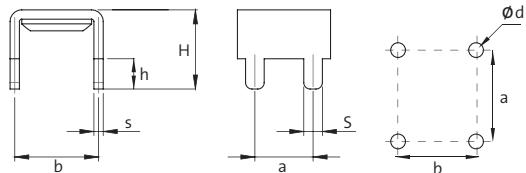

Product Description

PCB|SKL shield clamps are easy to use and effective in grounding single cable shields.

PCB|SKL consist of SKL clamps, fixed on a soldering foot that enables assembly on printed circuit boards. There are various designs to choose from.

Advantages & Benefits

- The spring design requires no adjustments and will permanently maintain contact to the cable shield
- Large contact area

Specifications

Material

SKL-clamp Spring steel, zinc plated
PCB-foot Brass, tin plated

Type	Order No.	Height H [mm] 0.268 "	Width s [mm] 0.031 "	Pin h [mm] 0.102 "	Pin S [mm] 0.063 "	Grid a x b [mm] 0.283 x 0.197 "	Drill-hole d [mm] 0.071 "	PU
PCB-4-V-6,8 SKL 1.5-3 (Clamping range 1.5 - 3 mm / 0.059 - 0.118 ")	36650.1	6.8 0.268 "	0.8 0.031 "	2.6 0.102 "	1.6 0.063 "	7.2 x 5 0.283 x 0.197 "	Ø 1.8 0.071 "	10
PCB-4-V-6,8 SKL 3-6 (Clamping range 3 - 6 mm / 0.118 - 0.236 ")	36650.2	6.8 0.268 "	0.8 0.031 "	2.6 0.102 "	1.6 0.063 "	7.2 x 5 0.283 x 0.197 "	Ø 1.8 0.071 "	10
PCB-4-V-6,8 SKL 6-8 (Clamping range 6 - 8 mm / 0.236 - 0.315 ")	36650.3	6.8 0.268 "	0.8 0.031 "	2.6 0.102 "	1.6 0.063 "	7.2 x 5 0.283 x 0.197 "	Ø 1.8 0.071 "	10
PCB-4-V-12,5 SKL 1.5-3 (Clamping range 1.5 - 3 mm / 0.059 - 0.118 ")	36656.1	12.5 0.492 "	1 0.039 "	4 0.157 "	1.6 0.063 "	10.1 x 5 0.398 x 0.197 "	Ø 1.8 0.071 "	10
PCB-4-V-12,5 SKL 3-6 (Clamping range 3 - 6 mm / 0.118 - 0.236 ")	36656.2	12.5 0.492 "	1 0.039 "	4 0.157 "	1.6 0.063 "	10.1 x 5 0.398 x 0.197 "	Ø 1.8 0.071 "	10
PCB-4-V-12,5 SKL 6-8 (Clamping range 6 - 8 mm / 0.236 - 0.315 ")	36656.3	12.5 0.492 "	1 0.039 "	4 0.157 "	1.6 0.063 "	10.1 x 5 0.398 x 0.197 "	Ø 1.8 0.071 "	10

NEW	PCB-ET-4-V-4,1 SKL 3-6 (Clamping range 3 - 6 mm / 0.118 - 0.236 ")	36653.1	17.5 0.689 "	0.3 0.012 "	2.6 0.102 "	1.6 0.063 "	5 x 7.2 0.283 "	Ø 1.8 0.071 "	25
------------	---	---------	-----------------	----------------	----------------	----------------	--------------------	------------------	----