



QT

Cable Grommets

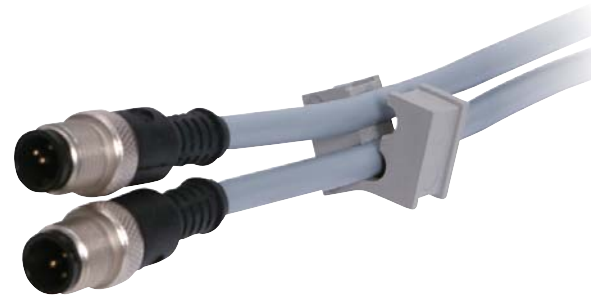

IP54



1.2

Product Description

The QT range supports cable diameters from 1 to 15 mm. They are used with cable entry frames and cord grips of product groups 1.21, 1.22 & 1.23.

Assembly Note


When installing the grommets, the flat side should be facing the middle of the frame. This allows the flat sides of adjacent grommets to match up and provide a secure seal.

Specifications

Material	Elastomer
Flame class	UL94-Vo
IP Rating	IP54
Operating temperature	- 40°C to + 90°C (static) - 40°F to + 194°F (static)
Properties	Halogen-free, silicone-free

Accessories

ST Plugs 53

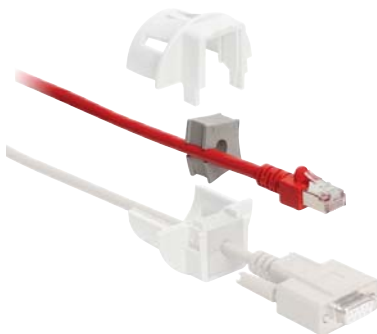

Grommet QT in combination with QVT-CLICK

Description	Type	Order No. gray	Clamping range	PU
QT B	QT B	42540	Blank grommet	10
	QT 1	42501	1 - 2 mm / 0.039 - 0.079 "	10
	QT 2	42502	2 - 3 mm / 0.079 - 0.118 "	10
QT	QT 3	42503	3 - 4 mm / 0.118 - 0.157 "	10
	QT 4	42504	4 - 5 mm / 0.157 - 0.197 "	10
	QT 5	42505	5 - 6 mm / 0.197 - 0.236 "	10
	QT 6	42506	6 - 7 mm / 0.236 - 0.276 "	10
	QT 7	42507	7 - 8 mm / 0.276 - 0.315 "	10
	QT 8	42508	8 - 9 mm / 0.315 - 0.354 "	10
	QT 9	42509	9 - 10 mm / 0.354 - 0.394 "	10
	QT 10	42510	10 - 11 mm / 0.394 - 0.433 "	10
	QT 11	42511	11 - 12 mm / 0.433 - 0.472 "	10
QT-ASI	QT 12	42512	12 - 13 mm / 0.472 - 0.512 "	10
	QT 13	42513	13 - 14 mm / 0.512 - 0.551 "	10
	QT 14	42514	14 - 15 mm / 0.551 - 0.591 "	10
	QT-ASI 1	42573	1x ASI-cable	10
	QT-ASI 2	42574	2x ASI-cable	10
QT tele	QT tele	42575	Telephone cable	10
	QT 2 3	42566	2x ø 3 mm / 0.118 "	10
	QT 2 4	42568	2x ø 4 mm / 0.157 "	10
	QT 2 5	42570	2x ø 5 mm / 0.197 "	10
QT 2 x	QT 2 5.5	42571	2x ø 5.5 mm / 0.217 "	10
	QT 2 6	42572	2x ø 6 mm / 0.236 "	10
	QT 2 6.5	42576	2x ø 6.5 mm / 0.256 "	10
	QT 2 7	42578	2x ø 7 mm / 0.276 "	10
	QT 4 3	42580	4x ø 3 mm / 0.118 "	10
QT 4 x	QT 4 4	42582	4x ø 4 mm / 0.157 "	10
	QT 4 4.5	42583	4x ø 4.5 mm / 0.177 "	10
	QT 4 5	42584	4x ø 5 mm / 0.197 "	10
	QT 4 5.5	42585	4x ø 5.5 mm / 0.217 "	10
	QT 4 6	42586	4x ø 6 mm / 0.236 "	10