


# RLF EMC Clamp Assembly

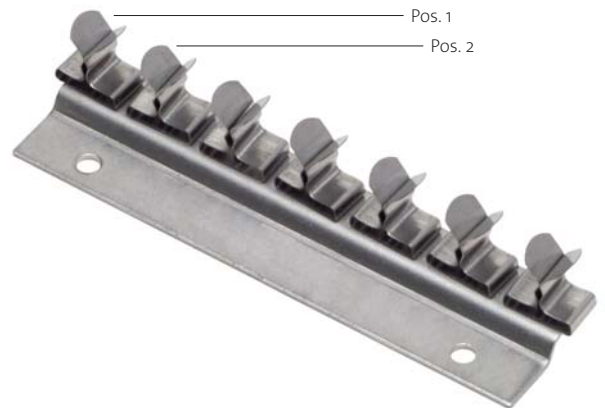

Type	Order No. (unfitted)	Number of shield clamps	Length	Width	PU
RLF (x3)	36965	3× SKL	46.2 mm 1.819 "	24 mm 0.945 "	1
RLF (x4)	36984	4× SKL	60.8 mm 2.394 "	24 mm 0.945 "	1
RLF (x5)	36958	5× SKL	72.4 mm 2.85 "	24 mm 0.945 "	1
RLF (x6)	36952	6× SKL	88 mm 3.465 "	24 mm 0.945 "	1
RLF (x7)	36963	7× SKL	103.6 mm 4.079 "	24 mm 0.945 "	1
RLF (x8)	36953	8× SKL	119.2 mm 4.693 "	24 mm 0.945 "	1
RLF (x9)	36985	9× SKL	140.8 mm 5.543 "	24 mm 0.945 "	1
RLF (x10)	36954	10× SKL	150.4 mm 5.096 "	24 mm 0.945 "	1
RLF (x11)	36955	11× SKL	166 mm 6.535 "	24 mm 0.945 "	1
RLF (x12)	36962	12× SKL	181.6 mm 7.15 "	24 mm 0.945 "	1

## Product Description

Comparable with the RLFZ clamp assembly, but without strain relief.

There are 10 different carriers available which can be user configured with up to 12 SKL shield clamps.

The EMC shield clamps as listed below are available to mount

SKL 1.5-3 | SKL 3-6 | SKL 6-8 | SKL 8-11

## Advantages & Benefits

- Designed for high density applications
- Possibility to configure custom specific EMC clamp assembly
- Online design tool for EMC Clamp assembly

## Specifications

### Material

SKL-clamp    **Spring steel, zinc plated**  
RLF-foot    **Stainless steel**