

SPECIFICATIONS

| | |
|---------------------------|---|
| START INPUT | Gate/Pulse start (programmable) |
| ACCURACY | ±0.05% of F.S or 50 msec (F.S.=Full Scale) |
| RESET | Front, Remote, Power interruption (programmable) |
| OUTPUT CONTACT | 2 SPST (2 NO) |
| RELAY RATING | 5A @ 230V AC |
| MODES | ON delay / Interval delay Cyclic ON first / Cyclic OFF first Forward-pause-reverse Instantaneous + delayed Batch |
| TIME RANGES | 0-99.99 sec 0-999.9 sec 0-9999 sec 0-99:59 min:sec, 0-999.9 min 0-9999 min 0-99:59 hr:min, 0-999.9 hr 0-9999 hr |
| COUNTING DIRECTION | Up/Down |
| MEMORY | 10 years |
| CONFIGURATION LOCK | Password protected |
| SUPPLY VOLTAGE | 90 to 270V AC/DC (50/60Hz) -15% to 10% tolerance |
| POWER CONSUMPTION | 5VA max. |
| TEMPERATURE | Operating: 0-50°C (32 to 122°F) Storage: -20 to 75°C (-4 to 167°F) |
| HUMIDITY | 95% RH (non-condensing) |
| WEIGHT | 6.2 oz. |
| PROTECTION LEVEL | IP65 for faceplate |


24V AC/DC MODEL AVAILABLE
Please consult factory




Multifunction Timer

- Multifunction - 7 Timing Functions
- 9 Time Ranges
- Dual Display, 4 Digit, 7 segment LED
- LED Status Indicator:
Relay Status, Seconds, Minutes, Hours
- 2 Setpoints
- Batch Function

DIMENSIONS (INCHES/MILLIMETERS)

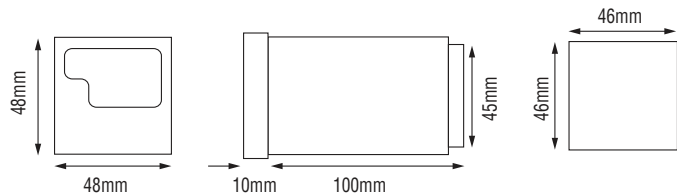

TERMINAL CONNECTIONS

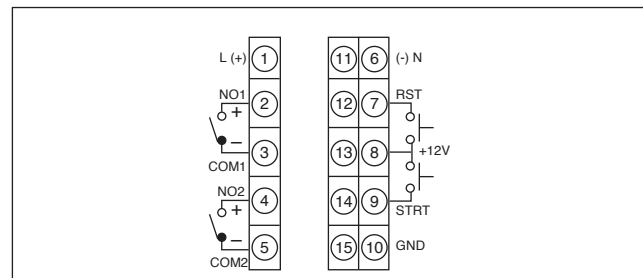

cULUS Cable Size (AWG): 13; Stud Hole for Lug (inch): 0.137; Tightening Torque (Lb-inch): 7

ORDERING INFORMATION

| | |
|---------------------|-----------------------|
| MODEL NUMBER | SUPPLY VOLTAGE |
| 425AR100T5X | 90 to 270 V AC/DC |

TIMING DIAGRAMS

