

MODEL A58HB - ABSOLUTE HOLLOW BORE ENCODER



Ø58 mm



FEATURES

- Single Turn/Multi-Turn Absolute Encoder (16 Bit ST / 43 Bit MT)
- SSI or CANopen® communication
- Maintenance-free and environmentally friendly magnetic design
- Energy harvesting magnetic multi-turn technology
- No gears or batteries
- 58 mm (2.28") diameter blind hollow bore encoder
- Flex mount eliminates couplings and is ideal for motors and shafts
- Meets CE/EMC standards for immunity and emissions


The Model A58HB Absolute Encoder offers a high performance solution for your absolute feedback needs. It provides maintenance-free feedback thanks to its innovative battery-free and gear-free multi-turn technology. This encoder is especially suited for applications where position information must be retained after loss of system power. Its rugged magnetic technology and high IP rating make the Model A58HB an excellent choice, even in tough industrial environments. Available with bores up to 3/8" or 14 mm and two flexible mounting options, the Model A58HB is easily designed into a variety of applications.

COMMON APPLICATIONS

Robotics, Telescopes, Antennas, Medical Scanners, Wind Turbines, Elevators, Lifts, Motors, Automatic Guided Vehicles, Rotary and X/Y Positioning Tables

MODEL A58HB ORDERING GUIDE

Blue type indicates price adder options

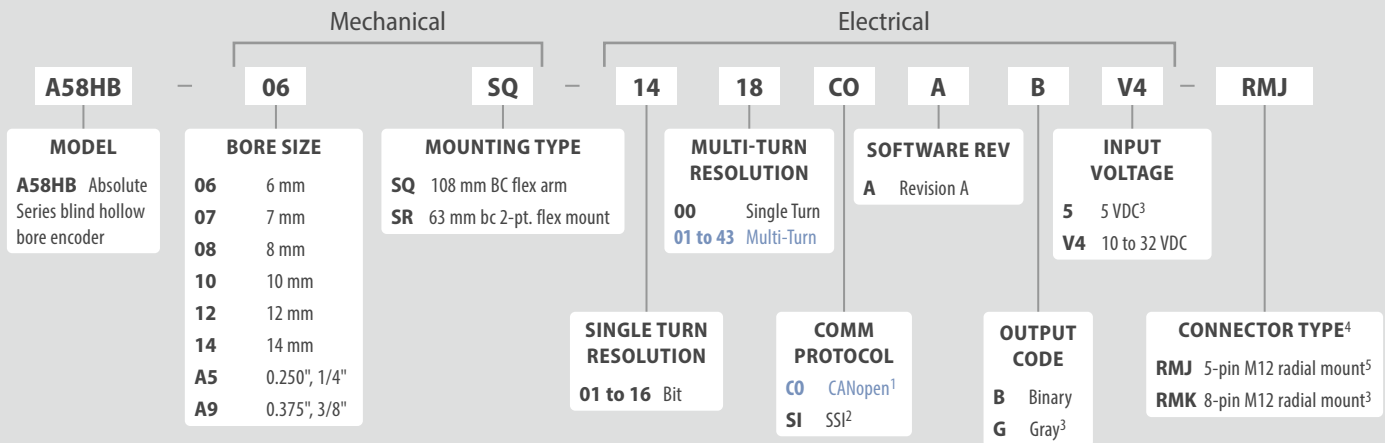

Notes:

- Please refer to [CANopen® Interface Technical Reference Manual](#) at encoder.com.
- Please refer to Technical Bulletin [TB-529: Understanding EPC's SSI Encoders](#) at encoder.com.
- Available with SSI only.
- For mating connectors, cables, and cordsets see Accessories at encoder.com. For Connector Pin Configuration Diagrams, see Technical Information or see [Connector Pin Configuration Diagrams](#) at encoder.com.
- Available with CANopen® only.

MODEL A58HB - ABSOLUTE HOLLOW BORE ENCODER

MODEL A58HB SPECIFICATIONS

Electrical

Input Voltage..... 10 to 32 VDC max
 5 VDC SSI Only
 Input Current..... 50 mA typical for 10 to 32 VDC
 80 mA typical for 5 VDC
 Power Consumption..... 0.5 W max
 Resolution (Single) 01 to 16 bit
 Resolution (Multi) 01 to 43 bit
 Accuracy..... $<\pm 0.35^\circ$
 Repeatability $<\pm 0.2^\circ$
 CE/EMC..... Immunity tested per EN 61000-6-2:2006
 Emissions tested per EN 61000-6-3:2011

CANopen® Interface

Protocol..... CANopen®:
 Communication profile CiA 301
 Device profile for encoder CiA 406 V3.2 class C2
 Node Number 0 to 127 (default 127)
 Baud Rate..... 10 Kbaud to 1 Mbaud with automatic bit rate detection
 Note: The standard settings, as well as any customization in the software, can be changed via LSS (CiA 305) and the SDO protocol (e.g., PDOs, scaling, heartbeat, node-ID, baud rate, etc.)

Programmable CANopen Transmission Modes

Synchronous..... When a synchronization telegram (SYNC) is received from another bus node, PDOs are transmitted independently
 Asynchronous..... A PDO message is triggered by an internal event (e.g., change of measured value, internal timer, etc.)

SSI Interface

Clock Input Via opto coupler
 Clock Frequency..... 100KHz to 500KHz. Higher frequencies may be available. Contact Customer Service.
 Data Output..... RS485 / RS422 compatible
 Output Code Gray or binary
 SSI Output Angular position value
 Parity Bit Optional (even/odd)
 Error Bit..... Optional
 Turn On Time < 1.5 sec
 Pos. Counting Dir. Connect DIR to GND for CW
 Connect DIR to VDC for CCW
 (when viewed from shaft end)
 Set to Zero..... Yes, see Technical Bulletin *TB-529: Understanding EPC's SSI Encoders*
 Protection..... Galvanic Isolation with SSI option

Mechanical


Max Shaft Speed..... 6,000 RPM
 Shaft Rotation Bi-directional
 Radial Run-out 0.007" max
 Axial Endplay..... ± 0.030 " max
 Radial Shaft Load 17 lb (80 N) = bearing life of 1×10^9 revolutions
 Axial Shaft Load 11 lb (50 N) max = bearing life of 1×10^9 revolutions
 Starting Torque..... 2.3 oz-in typical
 Housing..... All metal with protective finish
 Bearings..... 2 precision ball bearings
 Weight 7.5 oz typical

Environmental


Operating Temp -40° to 85° C
 Storage Temp..... -40° to 100° C
 Vibration 5.1 g (10 Hz up to 2000 Hz)
 Shock 100 g (6 ms)
 Sealing IP67, shaft sealed to IP65

MODEL A58HB - ABSOLUTE HOLLOW BORE ENCODER

MODEL A58HB 108 MM BC FLEX ARM (SQ)

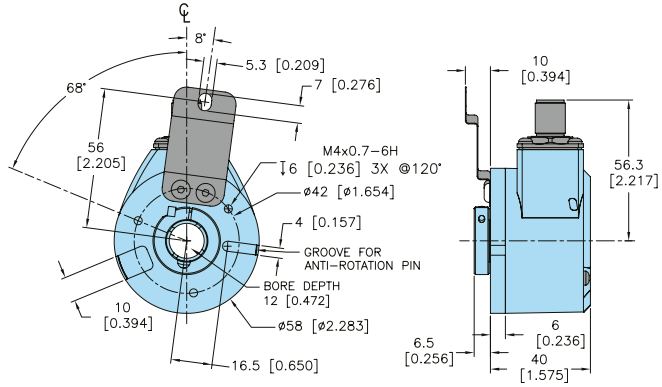

MODEL A58HB 63 MM 2 PT. FLEX MOUNT (SR)

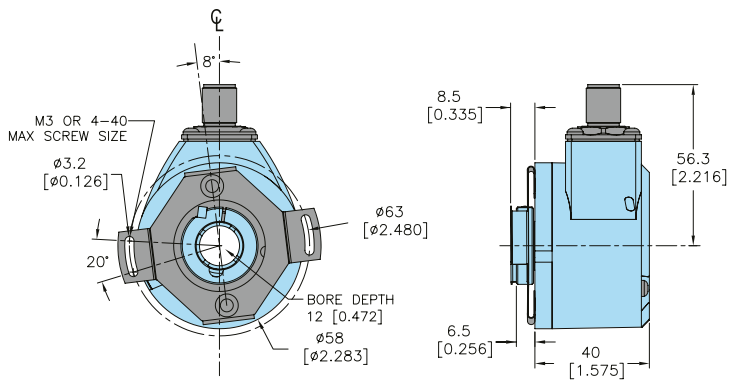

All dimensions are in inches with a tolerance of $\pm 0.005"$ or $\pm 0.01"$ unless otherwise specified.
 Metric dimensions are given in brackets [mm].

MODEL A58HB - ABSOLUTE HOLLOW BORE ENCODER


WIRING TABLE

For EPC-supplied mating cables, refer to wiring table provided with cable.

For CE (Conformity European) requirements, use M12 cordset with shield connected to M12 coupling nut. Trim back and insulate unused wires.

SSI Encoders


8-pin M12



Function	8-Pin M12
Ground (GND)	1
+VDC	2
SSI CLK+	3
SSI CLK-	4
SSI DATA+	5
SSI DATA-	6
PRESET	7
DIR	8
Shield	Housing

CANopen® Encoders

5-pin M12



Function	5-Pin M12
+VDC	2
Ground (GND)	3
CAN _{High}	4
CAN _{Low}	5
CAN _{GND} / Shield	1

*M12 connector is connected to encoder housing

EPC RESERVES THE RIGHT TO UPDATE, REVISE AND AMEND ALL SOFTWARE AND TECHNICAL DATA OR CONTENT AT ANY TIME. EPC SHALL HAVE NO LIABILITY OF ANY KIND OR NATURE FOR ANY TECHNICAL ERRORS OR OMISSIONS IN ANY SOFTWARE OR TECHNICAL DATA. See encoder.com for more information.