

Inductive Sensor with Full-Metal Housing

I12G003

Part Number

wenglorTec



- Easy sensor configuration using the IO-Link interface
- Increased switching distance
- Innovative ASIC circuit technology
- IO-Link 1.1
- Minimal mounting clearance thanks to wenglor weproTec

The inductive sensors with full-metal housing are suitable for harsh ambient conditions and washdown areas thanks to the 316L stainless steel housing. The sensors with full-metal housing impress with their easy installation and reliable switching behavior. In addition to error-free operation of several sensors in a very small space, the new generation also provides the possibility of detecting system errors before it's too late thanks to ASIC, IO-Link interface and wenglor weproTec.



Technical Data

Inductive Data	
Switching Distance	10 mm
Correction Factors Stainless Steel V2A/CuZn/Al	1,13/0,54/0,53
Mounting	Non-flush
Mounting A/B/C/D in mm	12/52/30/14
Mounting A/B/C/D (V2A) in mm	12/52/30/14
Mounting B1 in mm	0...20
Installation B1 (V2A) in mm	0...20
Switching Hysteresis	< 10 %
Electrical Data	
Supply Voltage	10...30 V DC
Supply Voltage with IO-Link	18...30 V DC
Current Consumption (U _b = 24 V)	< 15 mA
Switching Frequency	375 Hz
Temperature Drift	< 10 %
Temperature Range	-25...70 °C
Switching Output Voltage Drop	< 1 V
Switching Output/Switching Current	100 mA
Residual Current Switching Output	< 100 µA
Short Circuit Protection	yes
Reverse Polarity and Overload Protection	yes
Interface	IO-Link V1.1
Mechanical Data	
Housing Material	Stainless steel, V4A (1.4404 / 316L)
Sensing face	Stainless steel, V4A
Degree of Protection	IP67/IP68/IP69K *
Connection	M12 × 1; 4-pin
Torque	max. 25 Nm
Pressure Resistance Sensor Area	60 bar
EX II 3D Ex tc IIIC T90° Dc	yes
EX II 3G Ex ic IIC T5 Gc	yes
Safety-relevant Data	
MTTFd (EN ISO 13849-1)	3706,54 a
Packaging unit	1 Piece
PNP NO	<input checked="" type="checkbox"/>
Connection Diagram No.	227
Suitable Connection Equipment No.	2
Suitable Mounting Technology No.	170

* For applications inside hazardous areas: IP67

Complementary Products

IO-Link Master

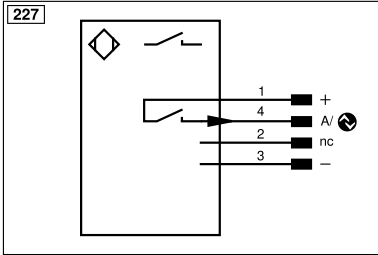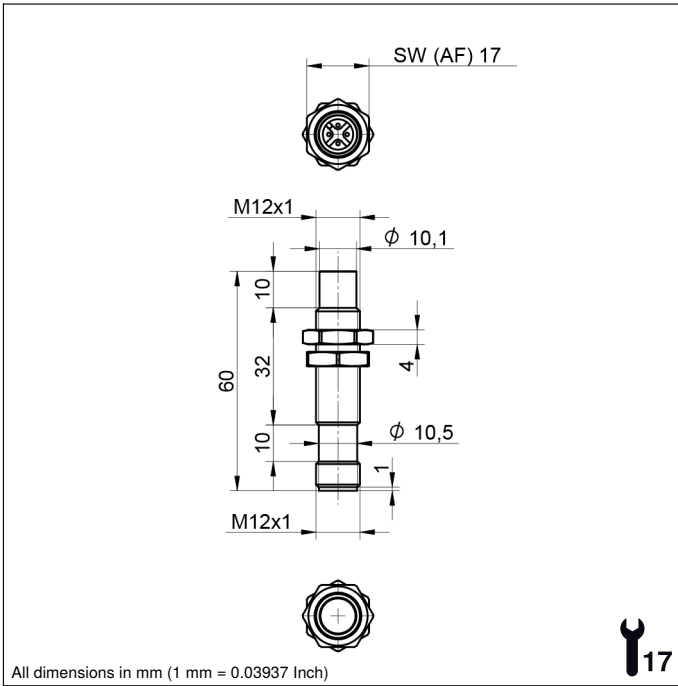

Legend				
+	Supply Voltage +	nc	Not connected	
-	Supply Voltage 0 V	U	Test Input	
~	Supply Voltage (AC Voltage)	Ü	Test Input inverted	
A	Switching Output (NO)	W	Trigger Input	
Ā	Switching Output (NC)	W-	Ground for the Trigger Input	
V	Contamination/Error Output (NO)	O	Analog Output	
ȳ	Contamination/Error Output (NC)	O-	Ground for the Analog Output	
E	Input (analog or digital)	BZ	Block Discharge	
T	Teach Input	Amv	Valve Output	
Z	Time Delay (activation)	a	Valve Control Output +	
S	Shielding	b	Valve Control Output 0 V	
RxD	Interface Receive Path	SY	Synchronization	
TxD	Interface Send Path	SY-	Ground for the Synchronization	
RDY	Ready	E+	Receiver-Line	
GND	Ground	S+	Emitter-Line	
CL	Clock	±	Grounding	
E/A	Output/Input programmable	SnR	Switching Distance Reduction	
IO-Link	IO-Link	Rx+/-	Ethernet Receive Path	
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path	
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)	
OSSD	Safety Output	La	Emitted Light disengageable	
Signal	Signal Output	Mag	Magnet activation	
BL_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation	
ENo RS422	Encoder 0-pulse 0/0 (TTL)	EDM	Contact Monitoring	
PT	Platinum measuring resistor	ENARs422	Encoder A/Ā (TTL)	
			ENBRs422	Encoder B/B̄ (TTL)
			ENA	Encoder A
			ENB	Encoder B
			AMIN	Digital output MIN
			AMAX	Digital output MAX
			AOK	Digital output OK
			SY In	Synchronization In
			SY OUT	Synchronization OUT
			OLT	Brightness output
			M	Maintenance
			rsv	Reserved
			Wire Colors according to DIN IEC 60757	
			BK	Black
			BN	Brown
			RD	Red
			OG	Orange
			YE	Yellow
			GN	Green
			BU	Blue
			VT	Violet
			GY	Grey
			WH	White
			PK	Pink
			GNYE	Green/Yellow

Mounting

