

# Connection Line

7/8"; 5-pin

## ZAS78R601



Part Number



### Technical Data

Electrical Data	
Supply Voltage	≤ 150 V AC/DC
Mechanical Data	
Connection 1	Socket, straight
Connection mode 1	7/8", 5-pin
Connection 2	stripped
Torque	1,5 Nm
Cable Length	10 m
Outer diameter (d)	8,7 mm
Wire cross-section	1,5 mm <sup>2</sup>
Degree of Protection	IP67
Temperature range (fixed installation)	-50...80 °C
Temperature range (moving application)	-20...80 °C
Cable Jacket Material	PUR
Material Wire Insulation	TPM
Material Sleeve Nut	CuZn
Halogen-free	yes
Drag Chain Suitable	yes
Bending radius (fixed installation)	> 7,5 × d
Bending radius (used in motion)	> 10 × d
Travel speed (with 5 m horizontal travel distance)	≤ 3,3 m/s
Acceleration	≤ 5 m/s <sup>2</sup>
Bending cycles	≤ 5000000
Packaging unit	1 Piece
Connection Diagram No.	<b>S75</b>
Connection Equipment No.	<b>78</b>

- Halogen free, drag chain suitability
- PUR, straight

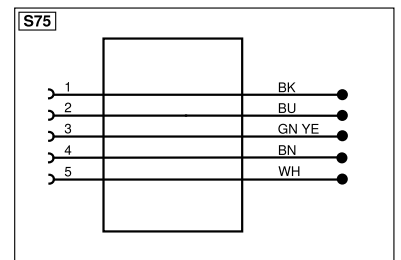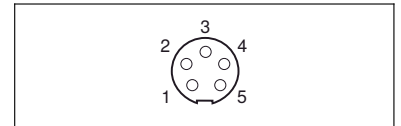

All dimensions in mm (1 mm = 0.03937 Inch)

\* Per terminal

Legend					
+	Supply Voltage +	nc	Not connected	ENB <sub>RS422</sub>	Encoder B/B̄ (TTL)
-	Supply Voltage 0 V	U	Test Input	ENA	Encoder A
~	Supply Voltage (AC Voltage)	Ū	Test Input inverted	ENb	Encoder B
A	Switching Output (NO)	W	Trigger Input	AMIN	Digital output MIN
Ā	Switching Output (NC)	W-	Ground for the Trigger Input	AMAX	Digital output MAX
V	Contamination/Error Output (NO)	O	Analog Output	AOK	Digital output OK
Ṽ	Contamination/Error Output (NC)	O-	Ground for the Analog Output	SY In	Synchronization In
E	Input (analog or digital)	BZ	Block Discharge	SY OUT	Synchronization OUT
T	Teach Input	AMV	Valve Output	QLT	Brightness output
Z	Time Delay (activation)	a	Valve Control Output +	M	Maintenance
S	Shielding	b	Valve Control Output 0 V	rsv	Reserved
RxD	Interface Receive Path	SY	Synchronization	Wire Colors according to DIN IEC 60757	
TxD	Interface Send Path	SY-	Ground for the Synchronization	BK	Black
RDY	Ready	E+	Receiver-Line	BN	Brown
GND	Ground	S+	Emitter-Line	RD	Red
CL	Clock	⊕	Grounding	OG	Orange
E/A	Output/Input programmable	SnR	Switching Distance Reduction	YE	Yellow
IO-Link	IO-Link	Rx+/-	Ethernet Receive Path	GN	Green
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path	BU	Blue
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)	VT	Violet
OSSD	Safety Output	La	Emitted Light disengageable	GY	Grey
Signal	Signal Output	Mag	Magnet activation	WH	White
Bi_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation	PK	Pink
ENo <sub>RS422</sub>	Encoder 0-pulse 0/0̄ (TTL)	EDM	Contact Monitoring	GNYE	Green/Yellow
PT	Platinum measuring resistor	ENAS <sub>RS422</sub>	Encoder A/Ā (TTL)		