

# DCC-SD Sample Draw System



The DCC-SD is a self-contained, single sensor, sample draw monitoring system that is designed to draw samples of air from hard to access locations such as shafts, tall ceilings, wells, pits, small rooms and many other locations where it is difficult to install gas detectors. The DCC-SD provides continuous sampling of target air over long periods of time. The DCC-SD system should be installed outside the target location, at a viewable height, with sample tubing running from the monitoring system to the sampled environment. The sample draw pump pulls air from the sampling area through the tubing, in through the inlet port and over the sensor. The air is then exhausted through the outlet port. If the gas readings are higher than a specified set point, the DCC-SD will go into alarm.

The DCC-SD can be used to monitor toxic or refrigerant gases and comes with a flow detector, a sample draw pump and an internal adjustable flow meter. Features include one configurable 4 - 20 mA output, one alarm level line voltage relay with field configurable time delays and trigger levels, a blocked flow alarm indicating a dirty filter or clogged tubing, a side mounted audible buzzer and an LCD digital display with LED indicators for channel alarm status and fault conditions. The filter should be replaced when it becomes dirty and the tubing should be checked regularly to ensure it remains unblocked. For the best response, the sample tubing between the sample point and the inlet port should be kept as short as possible. The device has been factory tested with 15.24 m (50 ft) of sample tubing. The type of gas, diameter and length of tubing will affect the rate of air flow, which is limited to 1L/min. Testing should be done if longer tubing is required to make sure the air flow is not less than 1L/min.


## KEY FEATURES

- » Single sensor
- » 2x16 character LCD display with LED indicators
- » Loud side mounted buzzer
- » Blocked flow alarm
- » Sample draw pump
- » Adjustable flow meter
- » One 5-amp SPDT dry contact relay
- » One configurable 4-20 mA output
- » Thermal resetting fuses
- » RoHS compliant circuit boards
- » Standard water / dust tight, corrosion resistant enclosure (drip proof)

## APPLICATIONS

- » Wastewater Treatment Plants
- » Meat Packing Plants
- » Aerospace Industry
- » Automotive Manufacturing
- » ... and many more

## TECHNICAL DRAWING

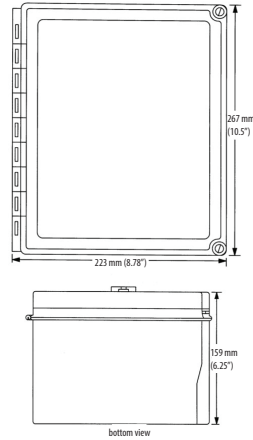

## TECHNICAL SPECIFICATIONS

### GAS SENSOR TYPES

Electrochemical	Carbon Monoxide (CO), Ethylene (C <sub>2</sub> H <sub>4</sub> ), Ethylene Oxide (C <sub>2</sub> H <sub>4</sub> O), Formaldehyde (CH <sub>2</sub> O), Hydrogen (H <sub>2</sub> ), Hydrogen Fluoride (HF), Hydrogen Sulphide (H <sub>2</sub> S), Nitric Oxide (NO), Sulphur Dioxide, (SO <sub>2</sub> ),
Solid State	R22, R134A, R402A, R404A, R407C, R410A, R422D, R438A, R507A, TVOCs

### MECHANICAL

Enclosure	Water / dust tight corrosion resistant polyester reinforced fiberglass
Weight	7.5 lb / 3.4 kg
Size	223 x 267 x 159 mm 8.8 x 10.5 x 6.3 in
Tubing (sold separately)	Standard: 1/8" ID x 1/4" OD DCC-SD-NH3: 3/16" ID x 5/16" OD Factory tested distance: 15.24 m (50 ft)

### USER INTERFACE

Display	2x16 character LCD digital display with LED panel indicating "CH1" state, "CH2" state, and "FAULT"
"SILENCE" Push Button	Temporarily clears buzzer and latched relay

### INPUT / OUTPUT

Output	One configurable 4-20 mA analog output
--------	----------------------------------------

### TECHNICAL SPECIFICATIONS CONT'

Relays	One SPDT dry contact relay, rated 5 amps @ 240 VAC
Audible Alarm	Side mounted buzzer, rated 90 dB @ 30 cm (1 ft)
Flow	Normal operation: 1.0 LPM Flow alarm: less than 0.5 LPM

### ELECTRICAL

Power Requirement	24 VAC nominal, 10 W, Class 2
Current Draw	400 mA RMS @ 24 VAC
Wiring	24 VAC two-conductor shielded
Fuses	Thermal, resetting

### ENVIRONMENTAL (sensor dependant)

Operating Temperature	-20°C to 40°C (-4°F to 104°F)
Humidity	15 - 90% RH non-condensing

### CERTIFICATION

Conforms to: CSA-C22.2 No. 205-12, UL508 (Edition 17):2007
Conforms to: EMC Directive 2004/108/EC EN 50270:2006, Type 1, EN61010
Conforms to: FCC. This device complies with Part 15 of the FCC Rules. For indoor use only.

Caution: The DCC-SD Sample Draw System should not be used inside classified hazardous areas or to sample draw combustible gases exceeding 50% LEL concentrations or Oxygen concentrations above 30% vol because the pump is not intrinsically safe.



Inside of the DCC-SD showing an LPT-A gas detector mounted inside the enclosure.

### PRODUCT CODES

<i>Electrochemical Toxic Gas Sensors</i>		<i>Lifespan</i>
<b>DCC-SD-NH3</b>	Ammonia (NH <sub>3</sub> ) sensor (0 - 500 ppm)	~ 2 yrs
<b>DCC-SD-COA</b>	Carbon Monoxide (CO) sensor (0 - 200 ppm)	~ 3 yrs
<b>DCC-SD-TCO</b>	Carbon Monoxide (CO) sensor (0 - 200 ppm)	~ 6 yrs
<b>DCC-SD-C2H4</b>	Ethylene (C <sub>2</sub> H <sub>4</sub> ) sensor (0 - 200 ppm)	~ 2 yrs
<b>DCC-SD-EETO</b>	Ethylene Oxide (C <sub>2</sub> H <sub>4</sub> O) sensor (0 - 20 ppm)	~ 2 yrs
<b>DCC-SD-CH2O</b>	Formaldehyde (CH <sub>2</sub> O) sensor (0 - 5 ppm)	~ 2 yrs
<b>DCC-SD-EH2</b>	Hydrogen (H <sub>2</sub> ) sensor (0 - 2,000 ppm)	~ 2 yrs
<b>DCC-SD-HF</b>	Hydrogen Fluoride (HF) sensor (0 - 10.0 ppm)	~ 2 yrs
<b>DCC-SD-H2S</b>	Hydrogen Sulphide (H <sub>2</sub> S) sensor (0 - 50 ppm)	~ 2 yrs
<b>DCC-SD-NO</b>	Nitric Oxide (NO) sensor (0 - 100 ppm)	~ 2 yrs
<b>DCC-SD-SO2</b>	Sulphur Dioxide (SO <sub>2</sub> ) sensor (0 - 20 ppm)	~ 2 yrs
<i>Solid State Gas Sensors</i>		<i>Lifespan</i>
<b>DCC-SD-SR22</b>	Refrigerants (R22) sensor (0 - 2,000 ppm)	~ 5 yrs
<b>DCC-SD-SR134A</b>	Refrigerants (R134A) sensor (0 - 2,000 ppm)	~ 5 yrs
<b>DCC-SD-SR402A</b>	Refrigerants (R402A) sensor (0 - 2,000 ppm)	~ 5 yrs
<b>DCC-SD-SR404A</b>	Refrigerants (R404A) sensor (0 - 2,000 ppm)	~ 5 yrs
<b>DCC-SD-SR407C</b>	Refrigerants (R407C) sensor (0 - 2,000 ppm)	~ 5 yrs
<b>DCC-SD-SR410A</b>	Refrigerants (R410A) sensor (0 - 2,000 ppm)	~ 5 yrs
<b>DCC-SD-SR422D</b>	Refrigerants (R422D) sensor (0 - 2,000 ppm)	~ 5 yrs
<b>DCC-SD-SR438A</b>	Refrigerants (R438A) sensor (0 - 2,000 ppm)	~ 5 yrs
<b>DCC-SD-SR507A</b>	Refrigerants (R507A) sensor (0 - 2,000 ppm)	~ 5 yrs
<b>DCC-SD-STVOC</b>	TVOCs sensor (0 - 500 ppm)	~ 5 yrs

### REMOTE DEVICES

<b>RSA-24V-R</b>	Remote LED strobe light with audible, red lens, 24 VDC/VAC, 8.9 cm / 3.5" dia, comes with mounting bracket
<b>RSH-24V-A</b> <b>RSH-24V-B</b> <b>RSH-24V-R</b>	Remote Horn/Strobe Combo, unmounted, 24 VAC/VDC, rated 99 dB @ 3 m (10 ft) (VAC), 97 dB @ 10 ft (3 m) (VDC), choice of Amber, Blue or Red lens

### ACCESSORIES

<b>CET-715A-SDP</b>	Sample Draw Pump Calibration Kit for 17, 34, 58, 74, 100 L cylinders, 1.0 LPM demand flow regulator & adapter to fit 17 L cylinder
<b>CET-8000-CMT</b>	Standard Sample Draw Tubing, Tygon clear polymer 15.24 m (50 ft) roll, 1/8" ID x 1/4" OD
<b>CET-8000-CTRL</b>	Teflon Lined Sample Draw Tubing, special non-absorbent for DCC-SD-NH <sub>3</sub> , 15.24 m (50 ft) roll, 3/16" ID x 5/16" OD

