



# THE SSC CONTROLS COMPANY

THE FOOT SWITCH EXPERTS®


## Product Information Sheet

### DS100 and DS100-DG (Dual-Pedal S-Series Foot Switch)

The DS100 consists of two S100 foot switches attached to a dual base, which connects the two pedals on a single platform with a single cable exiting the unit. The DS100-DG adds a durable steel guard.

#### Design features:

- Equipped with two S100 foot switches wired together with a single cable.
- Unit is wired so both switches cannot be operated at the same time (neither will work if both are pressed).
- Ideal for applications involving forward/reverse or up/down, such as lift tables and pipe rollers.
- Durable steel base with powder-painted finish.
- Heavy-duty cable with flexible strain relief.
- Non-slip traction pads and bumper feet.

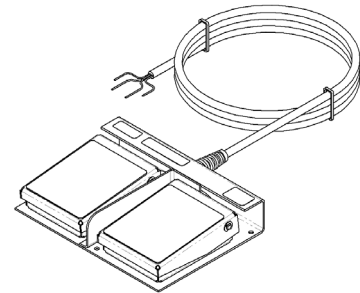

#### Quality features:

- ISO 9001 quality system certified.
- Includes a 1-year warranty on parts and labor.
- Made in USA of foreign and domestic content.

Wiring (16 gauge/ 4 conductor cable):  
 Right switch – white & black leads  
 Left switch – red & black leads  
 Case ground – green lead



**Model: DS100**

Dimensions, L x W x H: 8.0" x 5.9" x 1.7"

Weight: 5.1 pounds

Finish: powder paint, black



**Model: DS100-DG**

Dimensions, L x W x H: 10.2" x 6.0" x 6.2"

Weight: 8.5 pounds

Finish: powder paint, safety orange

Model	Action*	Rating	Cord	Certification
DS100	momentary	13 A, 125/250 VAC	8-foot cable with leads	
DS100-DG	momentary		8-foot cable with leads	

\*Momentary action: Press and hold to turn on, release to turn off. Both switches cannot be operated at the same time.

**Warning:** To avoid personal injury, do not use foot switches on machinery lacking effective point-of-operation safeguards. Disconnect input power before installation or maintenance.

The SSC Controls Company  
 8909 East Avenue Mentor, Ohio 44060  
 Phone: 440 205-1600 Fax: 440 205-1700