


- DISPLAYS 4 COLORS STEADY ON
- COMPACT AND PATENTED DESIGN, DOMED INDICATOR, EASY TO SEE OPERATOR GUIDANCE AND EQUIPMENT STATUS
- IP69K, WATERPROOF, SHOCK PROOF, CORROSION PROOF, OIL PROOF - CAN BE USED IN EXTREMELY HARSH ENVIRONMENT
- EASY TO USE, NO OTHER CONTROLLER NEEDED

QUAD-COLORED LED INDICATOR LIGHTS SPECIFICATIONS

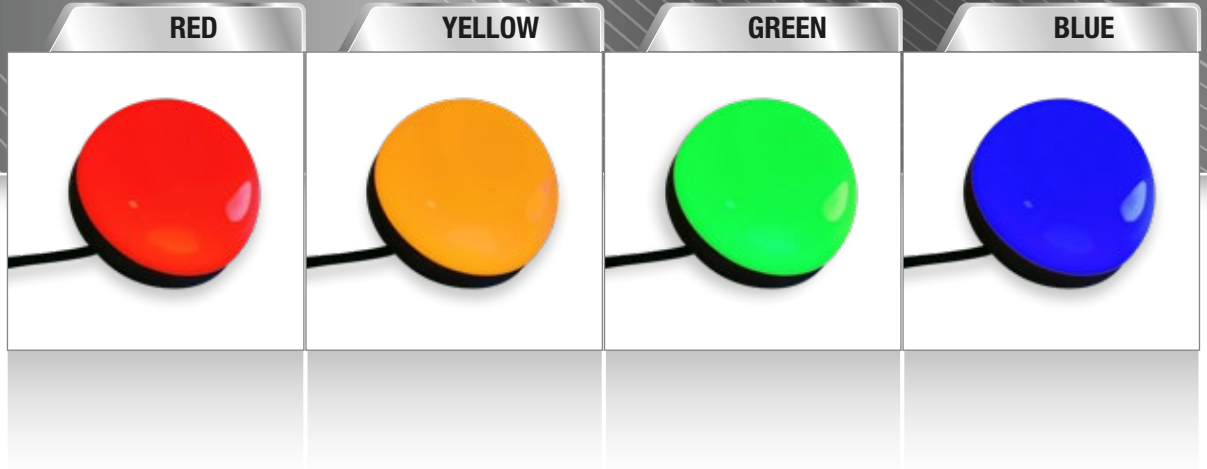

OPERATING VOLTAGE	12 V DC or 24 V DC		
OPERATING TEMPERATURE	-40 °C - +50 °C		
HOUSING MATERIAL	Powerful SMD LED, high transmittance and reinforced polycarbonate housing, rugged body, unique designed driver		
INDICATION COLORS	Red/Yellow/Green/Blue		
REVERSE POLARITY PROTECTION	Yes		
CURRENT CONSUMPTION	12 V DC 160 mA; 24 V DC 80 mA (no buzzer)		
INDICATION COLORS	Red/Yellow/Green/Blue		
RESPONSE TIME	< Indicator ON: 250 ms max.; Indicator OFF: 10 ms max		
IP RATING	IP69K		
LED LIFESPAN	100,000 hours		
DIMENSION	30 mm	50 mm	90 mm
PART NUMBERS			
2 m Pre-wired	R ■ Y ■ G ■ B ■	HL30-RYGB-2M	HL50-RYGB-2M
			HL90-RYGB-2M


*Please consult factory for touch and buzzer options.

QUAD-COLORED LED INDICATORS OFFER SPEED OF INSTALLATION AND EASY WIRING, WITH BRIGHT AND LONG LASTING LED'S.



In Canada: 3419 Mainway, Burlington, ON L7M 1A9
 In the USA: 1889 Maryland Ave., Niagara Falls, NY 14304
 Toll Free: 1-800-644-1756
 service@htmsensors.com

Proudly Supported by

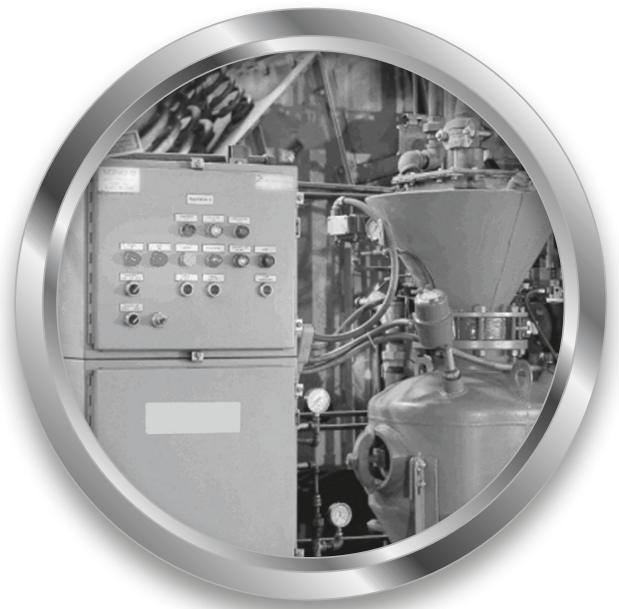

TOLL FREE: 1-800-644-1756