




SNIC IP67



■ Black
■ Gray

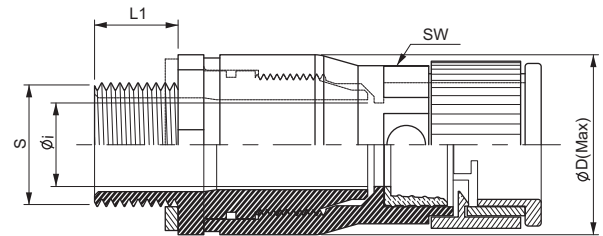

● M ● Pg

- Material: High Quality Polyamide6+Brass Nickel plated
- Protective: IP 67 (EN 60529)
- Temperature Range: -40° C to +105° C
- Short Term: up to +150° C
- Self-Extinguishing: UL94-HB
Free of Halogen Phosphorous and cadmium
- Color: Black & Gray
- Application: Tramway Vehicle Construction etc.

Pg Thread (DIN 40430)

(dimensions in mm)

Order No.									
Black	Gray	Thread	Fortube size	S	L1	Øi	ØD	SW	
SNIC-P09B	SNIC-P09G	Pg09	10	15.2	13	10	25	19.8	
SNIC-P11B	SNIC-P11G	Pg11	12	18.6	13	12	25	22.7	
SNIC-P136B	SNIC-P13G	Pg13.5	16	20.4	13	14	30	28	
SNIC-P16B	SNIC-P16G	Pg16	16	22.5	13	15	30	28	
SNIC-P21B	SNIC-P21G	Pg21	22	28.3	15	19	41	37.5	
SNIC-P29B	SNIC-P29G	Pg29	28	37	15	26	47	43	
SNIC-P36B	SNIC-P36G	Pg36	36	47	17	33	56	52.2	
SNIC-P48B	SNIC-P48G	Pg48	48	59.3	17	48	68	64.1	

Metric Thread (EN 60423)

SNIC-M10B	SNIC-M10G	M12 X 1.5	10	12	13	7	25	19.8	
SNIC-M12B	SNIC-M12G	M16 X 1.5	12	16	13	10	25	22.7	
SNIC-M16B	SNIC-M16G	M20 X 1.5	16	20	13	14	30	28	
SNIC-M22B	SNIC-M22G	M25 X 1.5	22	25	15	16	41	37.5	
SNIC-M28B	SNIC-M28G	M32 X 1.5	28	32	15	23	47	43	
SNIC-M36B	SNIC-M36G	M40 X 1.5	36	40	17	31	56	52.2	
SNIC-M48B	SNIC-M48G	M50 X 1.5	48	50	17	40	68	64.1	