


# TACL IP67



Black  
Gray

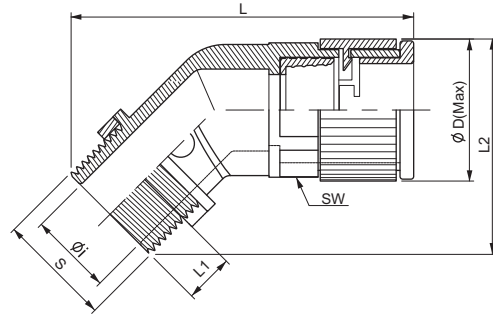

G(PF) M Pg

- Material: High Quality Polyamide6
- Protective: IP 67 (EN 60529)
- Temperature Range: -40° C to +105° C
- Short Term: up to +150° C
- Self-Extinguishing: UL94-HB
- Color: Black & Gray
- Application: Machine tool, Shipbuilding, Tramway Industrial / Automatic Machinery Printing Machine etc. connector for jointing into Limit - Switch.

## PF Thread / 45° Elbow (JIS B0202)

(dimensions in mm)

Order No.											
Black	Gray	Thread	For tube size	S	L <sub>1</sub>	L <sub>2</sub>	L	Ø <sub>i</sub>	Ø <sub>D</sub>	SW	
TACL-G10B	TACL-G10G	G1/2"	10	20.9	8	35.4	59	10	25	19.8	
TACL-G12B	TACL-G12G	G1/2"	12	20.9	8	38.4	62	12	25	22.7	
TACL-G16B	TACL-G16G	G1/2"	16	20.9	8	43.4	64	13	30	28	

## Metric Thread / 45° Elbow (EN 60423)

TACL-M10B	TACL-M10G	M12 X 1.5	10	12	8	32.2	56	6	25	19.8
TACL-M12B	TACL-M12G	M16 X 1.5	12	16	8	36.9	60	9	25	22.7
TACL-M16B	TACL-M16G	M20 X 1.5	16	20	8	43	65	13	30	28

## Pg Thread / 45° Elbow (DIN 40430)

TACL-P09B	TACL-P09G	Pg09	10	15.2	8	33.4	60	9	25	19.8
TACL-P110B	TACL-P110G	Pg11	10	18.6	8	34.4	60	9	25	19.8
TACL-P130B	TACL-P130G	Pg13.5	10	20.4	8	35	60	9	25	19.8
TACL-P11B	TACL-P11G	Pg11	12	18.6	8	37.7	66	9	25	19.8
TACL-P136B	TACL-P136G	Pg13.5	16	20.4	8	43.2	66	13	30	28
TACL-P16B	TACL-P16G	Pg16	16	22.5	8	44	66	13	30	28