





TICC IP67



■ Black
■ Gray

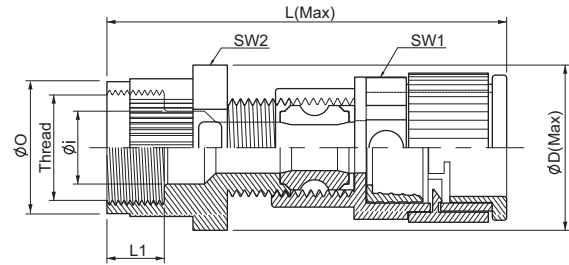

- Material: High Quality Polyamide6
- Protective: IP 67 (EN 60529)
- Temperature Range: -40° C to +105° C
- Short Term: up to +150° C
- Self-Extinguishing: UL94-HB
Free of Halogen Phosphorous and cadmium
- Color: Black & Gray
- Application: Machine tool, Shipbuilding, Tramway
Industrial / Automatic Machinery
Printing Machine etc. Connector to avoid the cut-off of the cable in the machine.

UNEF Thread (ASME B1.1)

(dimensions in mm)

Order No.													
Black	Gray	Thread	Fortube size	She3I Size	Øi (Min)	Øi (Max)	L1	L	Øo	ØD	SW1	SW2	
TICC-U1010B	TICC-U1010G	1/2-28UNEF	10	8S, 10S	3.5	6.5	10	69.5	18.4	25	22.6	22.6	
TICC-U1210B	TICC-U1210G	5/8-24UNEF	10	10SL, 12S	3.5	6.5	10	69.5	20.6	25	22.6	22.6	
TICC-U1410B	TICC-U1410G	3/4-20UNEF	10	14, 14S	3.5	6.5	10	69.5	24	25	22.6	22.6	
TICC-U1212B	TICC-U1212G	5/8-24UNEF	12	10SL, 12S	4	8	10	70	20.6	25	25.5	25.5	
TICC-U1412B	TICC-U1412G	3/4-20UNEF	12	14, 14S	4	8	10	70	24	25	25.5	25.5	
TICC-U1812B	TICC-U1812G	1-20UNEF	12	18	4	8	10	70	31	25	25.5	25.5	
TICC-U1616B	TICC-U1616G	7/8-20UNEF	16	16, 16S	7	12.3	10	74	28	30	25.4	25.4	
TICC-U1816B	TICC-U1816G	1-20UNEF	16	18	7	12.3	10	74	31	30	25.4	25.4	
TICC-U2016B	TICC-U2016G	1 3/16-18UNEF	16	20, 22	7	12.3	10	74	35.5	30	25.4	25.4	
TICC-U2816B	TICC-U2816G	1 7/16-18UNEF	16	24, 28	7	12.3	10	74	42	30	25.4	25.4	
TICC-U2222B	TICC-U2222G	1 3/16-18UNEF	22	20, 22	12	16	10	85	35.5	41	34	34	
TICC-U2822B	TICC-U2822G	1 7/16-18UNEF	22	24, 28	12	16	10	85	42	41	34	34	
TICC-U2828B	TICC-U2828G	1 7/16-18UNEF	28	24, 28	18	26	10	89	50	47	43.4	43.4	
TICC-U3228B	TICC-U3228G	1 3/4-18UNS	28	32	18	26	10	89	50	47	43.4	43.4	
TICC-U3628B	TICC-U3628G	2-18UNS	28	36	18	26	10	89	56.5	47	43.4	53	
TICC-U3636B	TICC-U3636G	2-18UNS	36	36	22	33	10	112	56.5	56	66.5	66.5	