




# TIPC IP67



■ Black  
■ Gray

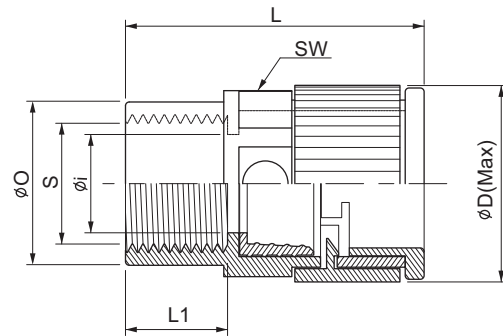

■ G(PF)

- Material: High Quality Polyamide6
- Protective: IP 67 (EN 60529)
- Temperature Range: -40° C to +105° C
- Short Term: up to +150° C
- Self-Extinguishing: UL94-HB
- Color: Black & Gray
- Application: Machine tool, Shipbuilding, Tramway Industrial / Automatic Machinery Printing Machine etc. Pipe with connector.

## PF Thread (JIS B0202)

( dimensions in mm )

Order No.											
Black	Gray	Thread	For tube size	S	L <sub>1</sub>	L	Ø <sub>i</sub>	Ø <sub>o</sub>	Ø <sub>d</sub>	SW	
TIPC-G16B	TIPC-G16G	G1/2"	16	18.6	13.8	41.8	14	28	30	27.7	
TIPC-G22B	TIPC-G22G	G3/4"	22	24.1	15	49	18	35	41	36.9	
TIPC-G28B	TIPC-G28G	G1"	28	30.2	15	54	25	41.5	47	43	
TIPC-G36B	TIPC-G36G	G1 1/4"	36	38.9	29	75	30	53	56	52.2	
TIPC-G42B	TIPC-G42G	G1 1/2"	48	44.8	29	81	42	66	68	64.1	
TIPC-G48B	TIPC-G48G	G2"	48	56.6	29	81	42	66	68	64.1	

