


# TIS IP67

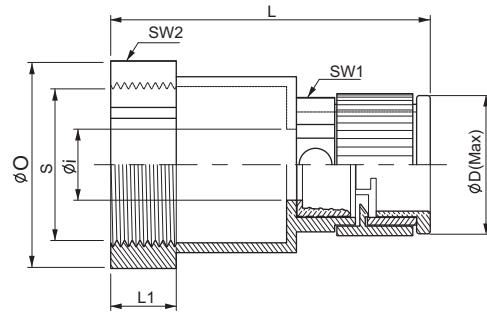

- Material: High Quality Polycarbonate
- Protective: IP 67 (EN 60529)
- Temperature Range: -40° C to +105° C
- Short Term: up to +150° C
- Self-Extinguishing: UL94-HB
- Color: Transparency
- Application: Machine tool, Shipbuilding, Tramway  
Industrial / Automatic Machinery  
Printing Machine etc. Sensor with connector

## Metric Thread (EN 60423)

(dimensions in mm)

Order No.	Thread	For tube size	S	L <sub>1</sub>	L	Ø <sub>i</sub>	Ø <sub>o</sub>	Ø <sub>d</sub>	SW	SW
TIS-M08T	M8 X 1	10	7.7	12.8	61.5	5	17.5	23	20	16
TIS-M12T	M12 X 1	10	11.6	12.8	61.5	9	20	23	20	18.3
TIS-M18T	M18 X 1	10	17.7	12.8	61.5	9	24	23	20	22
TIS-M30T	M30 X 1.5	10	28.5	12.8	61.5	9	38	23	20	34

