




TNCCL IP67



■ Black
■ Gray

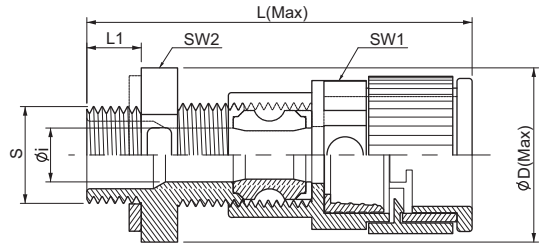

■ G(PF) ■ M ■ Pg

- Material: High Quality Polyamide6
- Protective: IP 67 (EN 60529)
- Temperature Range: -40° C to +105° C
- Short Term: up to +150° C
- Self-Extinguishing: UL94-HB
- Free of Halogen Phosphorous and cadmium
- Color: Black & Gray
- Application: Machine tool, Shipbuilding, Tramway
Industrial / Automatic Machinery
Printing Machine etc. Connector to avoid the cut-off of the cable in the machine.

PF Thread (JIS B0202)

(dimensions in mm)

Order No.											
Black	Gray	Thread	For tube size	Øi (Min)	Øi (Max)	S	L1	L	ØD	SW1	SW2
TNCCL-G10B	TNCCL-G10G	G1/2"	10	3.5	6.5	20.9	9	63.5	23	22.6	20.3
TNCCL-G12B	TNCCL-G12G	G1/2"	12	4	8	20.9	6	64	25	25.5	22.7
TNCCL-G16B	TNCCL-G16G	G1/2"	16	7	12.3	20.9	6	68	30	25.4	27.7

Metric Thread (EN 60423)

(dimensions in mm)

Order No.												
Black	Gray	Thread	For tube size	$\varnothing_i(\text{Min})$	$\varnothing_i(\text{Max})$	S	L1	L	\varnothing_D	SW1	SW2	
TNCCL-M10B	TNCCL-M10G	M12 X 1.5	10	3.5	6.5	12	9	63.5	23	22.6	20.3	
TNCCL-M120B	TNCCL-M120G	M16 X 1.5	10	3.5	6.5	16	9	63.5	23	22.6	20.3	
TNCCL-M102B	TNCCL-M102G	M12 X 1.5	12	4	7.1	12	9	64	25	25.5	22.7	
TNCCL-M12B	TNCCL-M12G	M16 X 1.5	12	4	8	16	9	64	25	25.5	22.7	
TNCCL-M162B	TNCCL-M162G	M20 X 1.5	12	4	8	20	9	64	25	25.5	22.7	
TNCCL-M126B	TNCCL-M126G	M16 X 1.5	16	7	10.9	16	6	68	30	25.4	27.7	
TNCCL-M16B	TNCCL-M16G	M20 X 1.5	16	7	12.3	20	9	68	30	25.4	27.7	
TNCCL-M216B	TNCCL-M216G	M25 X 1.5	16	7	12.3	25	6	68	30	25.4	27.7	

Pg Thread (DIN 40430)

TNCCL-P09B	TNCCL-P09G	Pg09	10	6.5	6.5	15.2	9	63.5	23	22.6	20.3	
TNCCL-P092B	TNCCL-P092G	Pg09	12	4	8	15.2	9	64	25	25.5	22.7	
TNCCL-P11B	TNCCL-P11G	Pg11	12	4	8	18.6	9	64	25	25.5	22.7	
TNCCL-P132B	TNCCL-P132G	Pg13.5	12	4	8	20.4	9	64	25	25.5	22.7	
TNCCL-P162B	TNCCL-P162G	Pg16	12	4	8	22.5	9	64	25	25.5	22.7	
TNCCL-P116B	TNCCL-P116G	Pg11	16	7	12.3	18.6	9	68	30	25.4	27.7	
TNCCL-P13B	TNCCL-P13G	Pg13.5	16	7	12.3	20.4	9	68	30	25.4	27.7	
TNCCL-P16B	TNCCL-P16G	Pg16	16	7	12.3	22.5	9	68	30	25.4	27.7	

