


# TNCL IP67



Black  
 Gray

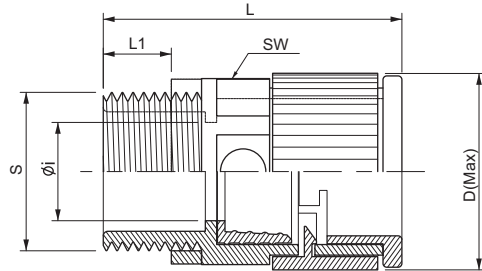

G(PF)    M    Pg

- Material: High Quality Polyamide6
- Protective: IP 67 (EN 60529)
- Temperature Range: -40° C to +105° C
- Short Term: up to +150° C
- Self-Extinguishing: UL94-HB  
Free of Halogen Phosphorous and cadmium
- Color: Black & Gray
- Application: Machine tool, Shipbuilding, Tramway  
Industrial / Automatic Machinery  
Printing Machine etc. connector for jointing into  
Limit - Switch.

## PF Thread / Straight (JIS B0202)

( dimensions in mm )

Order No.									
Black	Gray	Thread	For tube size	S	L <sub>1</sub>	L	Ø <sub>i</sub>	Ø <sub>d</sub>	SW
TNCL-G10B	TNCL-G10G	G1/2"	10	20.9	8	40	10	25	19.8
TNCL-G12B	TNCL-G12G	G1/2"	12	20.9	8	40	13	25	22.7
TNCL-G16B	TNCL-G16G	G1/2"	16	20.9	8	41	14	30	28

## Metric Thread/ Straight (EN 60423)

TNCL-M10B	TNCL-M10G	M12 X 1.5	10	12	8	40	7.5	25	19.8
TNCL-M120B	TNCL-M120G	M16 X 1.5	10	16	8	40	10	25	19.8
TNCL-M20B	TNCL-M20G	M20 X 1.5	10	20	8	40	10	25	19.8
TNCL-M102B	TNCL-M102G	M12 X 1.5	12	12	8	40	7.5	25	22.7
TNCL-M12B	TNCL-M12G	M16 X 1.5	12	16	8	40	11	25	22.7
TNCL-M202B	TNCL-M202G	M20 X 1.5	12	20	8	40	13	25	22.7
TNCL-M126B	TNCL-M126G	M16 X 1.5	16	16	8	41	11.5	30	28
TNCL-M16B	TNCL-M16G	M20 X 1.5	16	20	8	41	14	30	28
TNCL-M226B	TNCL-M226G	M25 X 1.5	16	25	8	41	14	30	28

## Pg Thread/ Straight (DIN 40430)

TNCL-P09B	TNCL-P09G	Pg09	10	15.2	8	40	10	25	19.8
TNCL-P160B	TNCL-P160G	Pg16	10	22.5	8	40	10	25	19.8
TNCL-P0912B	TNCL-P0912G	Pg09	12	15.2	8	40	10	25	22.7
TNCL-P11B	TNCL-P11G	Pg11	12	18.6	8	40	12.5	25	22.7
TNCL-P136B	TNCL-P136G	Pg13.5	16	20.4	8	41	14	30	28
TNCL-P16B	TNCL-P16G	Pg16	16	22.5	8	41	14	30	28