

MATCHING TABLE - COILS/ELECTROPILOTS - ELECTROPILOTS/SOLENOID VALVES			Electropilots						
			A (U05)	B (U04)	AA (U1)	AA (U3)		AB (U2)	
Coils	U04	10 mm		■					
	U05	15 mm	■						
	U1	22 mm			■				
	U2	30 mm						■	■
	U3	30 mm				■	■		
Solenoid valves	BE	ISO 1 - ISO 2 ISO 3 - ISO 4	■ (a)				■		R
	AE	ISO 1 - ISO 2			■	■			
	BD	ISO 01 26 mm ISO 02 18 mm	■						
	AC-N	Interface NAMUR			■	■			
	CL	G1/8			■	■			
	CM	G1/4							
	COMPA 2/4		■						
	G6	G1/8	■	■					
	GL6	sub-base							
	G7	G1/8	R		■	■			
	PS	tube Ø 4 tube Ø 6 tube Ø 8		■					
	AC	G1/8 - G1/4			■	■			
		G1/2			R	R		■	
	AF	G1/8			■	■			
		G1/4 - G3/8			■	■		■	
		G1/2 ÷ G1			R	R		■	
	AG	G1 1/2							■
G1/8				■	■				
G1/4 ÷ G1				R	R		■		
P15E	G1 1/2							■	
	G1/8		■						

■ = Standard R = Upon request (a) = Connector M12

10 mm U04 Coils for B series electropilots

■ With integrated 90° upward connector	<p>DE-352 24 V DC 1,2 W DE-452 24 V DC 1,35 W (with led) DE-355 24 V DC 0,5 W NEW</p>	<p>Connector: D-500 D-530-... D-535-...</p>	<td>■ With in-line connector</td> <td> <p>DE-552 24 V DC 1,2 W DE-652 24 V DC 1,35 W (with led) DE-555 24 V DC 0,5 W NEW</p> </td> <td> <p>Connector: D-500 D-530-... D-535-...</p> </td>	■ With in-line connector	<p>DE-552 24 V DC 1,2 W DE-652 24 V DC 1,35 W (with led) DE-555 24 V DC 0,5 W NEW</p>	<p>Connector: D-500 D-530-... D-535-...</p>
■ With loose cables (length 300 mm)	<p>DE-052L030 24 V DC 1,2 W</p>		<td>■ With in-line connector with protecting cover for complete tightness</td> <td> <p>DE-642I 12 V DC 1,35 W DE-652I 24 V DC 1,35 W (with led) DE-655I 24 V DC 0,5 W NEW</p> </td> <td> <p>Connector: D-530C-100 D-530C-200</p> </td>	■ With in-line connector with protecting cover for complete tightness	<p>DE-642I 12 V DC 1,35 W DE-652I 24 V DC 1,35 W (with led) DE-655I 24 V DC 0,5 W NEW</p>	<p>Connector: D-530C-100 D-530C-200</p>

15 mm U05 Coils for A series electropilot

■ with integrated 90° upward connector



DD-351 24 V DC 2 W

Connector:
D-500
D-530-...
D-535-...

■ with integrated 90° downward connector



DD-151 24 V DC 2 W

Connector:
D-500
D-530-...
D-535-...

■ with in-line connector



DD-551 24 V DC 2 W

Connector:
D-500
D-530-...
D-535-...

■ with loose cables



DD-051L030 12 V DC 2 W
DD-052L030 24 V DC 2,5 W

■ 15 mm - Faston



DD-013 230 V AC 50/60 Hz 3,5 VA
DD-040 24 V AC 50/60 Hz 2,3 VA
DD-041 12 V DC 2 W
DD-042 12 V DC 2,5 W
DD-050 48 V AC 50/60 Hz 2,3 VA

DD-051 24 V DC 2 W
DD-052 24 V DC 2,5 W
DD-060 110 V AC 50/60 Hz 2,3 VA
DD-070 230 V AC 50/60 Hz 2,3 VA

Connector:
AM-5109

U1 - U2 - U3 Coil

■ 22 mm (U1)



DA-0050 12 V DC 3,5 W
DA-0051 24 V DC 3,5 W
DA-0106 24 V AC 50/60 Hz 5 VA
DA-0108 110 V AC 50/60 Hz 5 VA
DA-0124 230 V AC 50/60 Hz 5 VA

■ 30 mm (U2)



DB-0501 12 V DC 11 W
DB-0502 24 V DC 11 W
DB-0507 24 V AC 50/60 Hz 10 VA
DB-0509 110 V AC 50/60 Hz 10 VA
DB-0510 230 V AC 50/60 Hz 10 VA

■ 30 mm (U3)



DC-0301 12 V DC 2,5 W
DC-0302 24 V DC 2,5 W
DC-0307 24 V AC 50/60 Hz 3,3 VA
DC-0309 110 V AC 50/60 Hz 3,3 VA
DC-0310 230 V AC 50/60 Hz 3,3 VA




U1-U2-U3 coils are certified in compliance with CSA regulation, certificate n. LR 113373-1.

For coils certified in compliance with UL regulation, please contact our Sales Office

Connectors

■ Miniature connector without wires

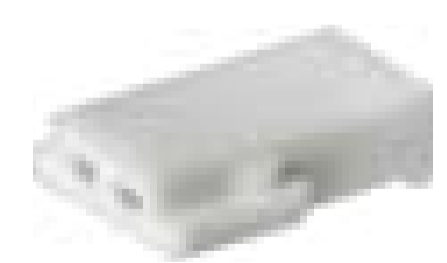

D-500

Coil:
U04/U05

■ Miniature connector with loose cables



D-530-30
D-530-50
D-530-200

Coil:
U04/U05

■ Miniature connector with cable



D-535-30
D-535-50
D-535-200

Coil:
U04/U05

■ 15 mm Connector



AM-5109

Coil:
U05

■ 20 mm Connector



AM-5110

Coil:
U1

■ 30 mm Connector



AM-5111

Coil:
U2/U3