


HANDHELD THERMOCOUPLE PROBES

The hand pyrometer thermocouple probes listed below are suitable for surface temperature measurements. The probes are designed for use with handheld pyrometers. All probes are supplied with retractable coiled cordset leads with an expandable length of 5 feet.

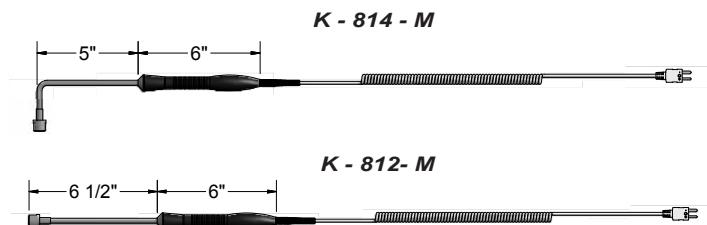

Hand Pyrometer Probes

CODES	PROBE STYLE	DESCRIPTION
COMPLETE ASSEMBLY		
K-812-M	Surface probe - straight	Heavy-Duty, Fast-Responding Tip 6 1/2" long
K-814-M	Surface probe - 90° bend	Heavy-Duty, Fast-Responding Tip 6 1/2" long

All probes are supplied with 316 Stainless Steel sheaths.

MOLTEN NON-FERROUS METAL LANCES AND THERMOCOUPLE TIPS

FIG. 1



FIG. 2



FIG. 3



Lances and Tips

CODE	DESCRIPTION	FIG. NO.
26 - 101P ^[1]	Ladle type, straight lance handle with plastic grip, 43" long	1
26 - 501P ^[1]	Furnace type, 90° lance handle with plastic grip, 43" long	2
26 - 501T - 8	8" Type K 446SS thermocouple tip with 43" leads	3
26 - 501T - 12	12" Type K 446SS thermocouple tip with 43" leads	3
26 - 501T - 15	15" Type K 446SS thermocouple tip with 43" leads	3
26 - 501T - 18	18" Type K 446SS thermocouple tip with 43" leads	3

[1] Does not include sensor.