


Sanitary Weld-In Thermowells are offered in 316 stainless steel. The thermowell is designed to be welded into a tank or vat with a full crevice-free fillet-weld to prevent corrosion, bacteria growth, and product contamination. Thermowells are supplied with a surface finish that meets or exceeds 32 $\mu$ in R<sub>a</sub>. Surface finishes of 15 $\mu$ in R<sub>a</sub> or better are available upon request. They are designed with a standard 0.260" bore diameter to accommodate sensing elements with a 0.252" maximum diameter. These wells are available as separate components or as part of complete sensor assemblies.

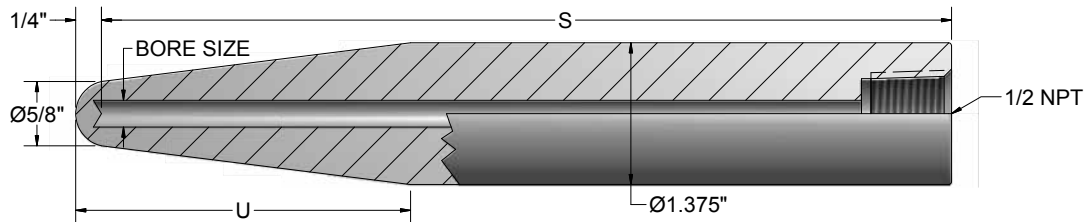

### ORDER CODES

**Example Order Number:**

1-0 1-1 1-2 1-3  
**W81 - 1 8 S**

#### 1-0 Well Type

CODE	DESCRIPTION
W81	Sanitary weld-in

#### 1-1 Length

CODE	"S" LENGTH	"U" LENGTH
1	8 1/4"	3 1/4"
2	9 7/8"	3 1/4"
3	11 5/8"	5"
4	12 7/8"	3 3/4"

#### 1-3 Options

CODE	DESCRIPTION
C8	316 stainless steel well cap and chain
S	Well stamped with customer-specified part number

#### 1-2 Material

CODE	DESCRIPTION
8	316 stainless steel