## Completely pre-assembled Signal Towers / RST 56 RST56 GN/YE/RD/Feet/Buzzer 24V



ļ

Part No.:	686.371.35	
Series:	RST 56	C C CA
MECHANI	CAL DATA	
Height		284 mm
Diameter		57 mm
Materials		ABS PC PC/ABS
Dome colour		White
Housing colour		Black
Protection category		IP66
Connection		Spring-type terminal
cross-sectional area minimum		0,14mm² / 26AWG
cross-sectional area maximum		1,50mm² / 16AWG
Cable entry		Through hole
Cable entry maximum		d = 9 mm
Type of fixing		Base mounting
Working temperature minimum		-20°C
Working temperature maximum		+50°C
Weight with packaging		308 g
Product weight		272 g
Stipping length		7 mm
ELECTRIC	AL DATA	
Operating voltage		24V
Operating voltage type		DC
Operating voltage tolerance		+/- 10%
Protection class		Protection class 3
Pollution degree		3
OPTICAL I	DATA	
Light source		LED
Light colour		Green Red Yellow
Optical signal image		Permanent
Service life optical		50,000 h maximum
ACOUSTIC	C DATA	
Volume (max) at 1m distance		90
Acoustic signal image		Continuous tone Pulse tone
Number of tones		2 tone


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

## Completely pre-assembled Signal Towers / RST 56 RST56 GN/YE/RD/Feet/Buzzer 24V

Volume adjustable	Switch		
Volume adjustment range	82~90		
Audio frequency	2900 Hz		
· · ·			
APPROVAL DATA			
Conforms with CE	Yes		
Conforms with RoHS directive	Yes		
WEEE	Yes		
Conforms with ATEX-directive	No		
Conforms with CCC-Ex	No		
Conforms with CCC	No		
Conforms with UL	No		
Conforms with FCC	No		
Conforms with IC	No		
EAC certificate available	No		
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)		
Conforms with CMIM	No		
Conforms with AS-I	No		
Conforms with DNV	No		
Conforms with RoHS CN	10 years		
Conforms with VdS	No		

Provide the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Completely pre-assembled Signal Towers / RST 56 RST56 GN/YE/RD/Feet/Buzzer 24V

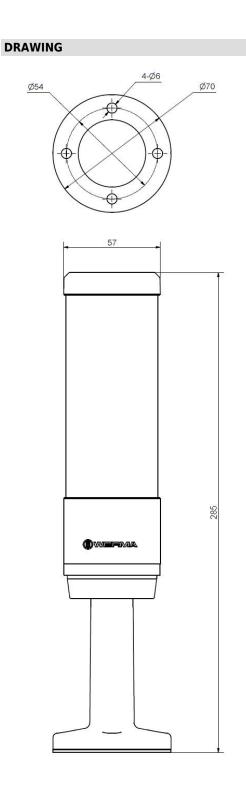

Pror additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.