Completely pre-assembled Signal Towers / RST 56 RST56 Built-In 24V GN/YE/RD

Part No.: 686.373.05

Series:

RST 56



ļ

MECHANICAL DATA	
MECHANICAL DATA	200
Height	209 mm
Diameter	57 mm
Materials	ABS PC
	PC/ABS
Dome colour	White
Housing colour	Black
Protection category	IP66 IP69K
Connection	M12 socket 5-pole
Type of fixing	Built-in mounting
Working temperature minimum	-30°C
Working temperature maximum	+50°C
Weight with packaging	265.8 g
Product weight	226.8 g
ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Protection class	Protection class 3
Pollution degree	3
OPTICAL DATA	
Light source	LED
Light colour	Green Red Yellow
Service life optical	50,000 h maximum
APPROVAL DATA	
Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC-Ex	No
Conforms with CCC	No
Conforms with UL	No
Conforms with FCC	No
Conforms with IC	No


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Completely pre-assembled Signal Towers / RST 56 RST56 Built-In 24V GN/YE/RD

EAC certificate available	No
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with CMIM	No
Conforms with AS-I	No
Conforms with DNV	No
Conforms with RoHS CN	25 years
Conforms with VdS	No

Pror additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Completely pre-assembled Signal Towers / RST 56 RST56 Built-In 24V GN/YE/RD

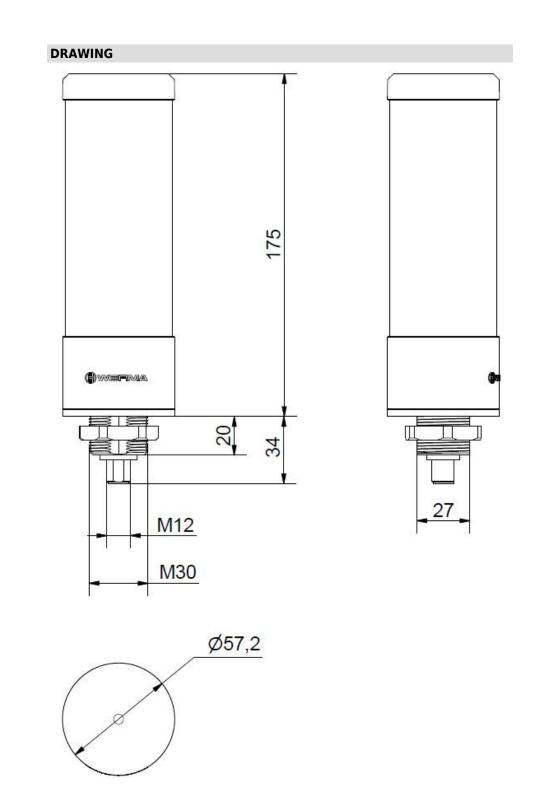

Provide the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.