D2SA


Z-L 3GS-71 Laser Sensor

# D series



- CMOS Image Sensor + Digital Monitor for easy setting.
- DR-Q series, transparent detection with AGC (Automatic Gain Control) function.
- BGS-DL series, the leading edge of BGS type sensors, the ultimate in Diffuse Reflective sensing.
- DT series, long distance Thru-beam sensor (max. 100 meters).

### **Applications**



For thin workpieces on a fluttering conveyor. (BGS-DL10T)



Any transparent object, PET / Glass / Plastic. (DR-Q150)



Positioning for ink printer (DR-500)



Stable sensing of aluminum pouch (DR-500)

# **Product Types**

Coble / OD	Outnut	BGS / Accurate type		
Cable / QD	Output	Laser CMOS Teach-in	Potentiometer	
Distance		40 - 100mm		
0-1-1-	NPN	BGS-DL10TN	BGS-DL10N	
Cable	PNP	BGS-DL10TP	BGS-DL10P	
Me OD	NPN	BGS-DL10TCN	BGS-DL10CN	
M8-QD	PNP	BGS-DL10TCP	BGS-DL10CP	

Cable / OD	0	BGS / Longer distance			
Cable / QD	Output	Laser CMOS Teach-in	Potenti	ometer	
Distance		100 - 250mm	100 - 300mm	100 - 700mm	
0-1-1-	NPN	BGS-DL25TN	BGS-DL30N	BGS-DL70N	
Cable	PNP	BGS-DL25TP	BGS-DL30P	BGS-DL70P	
M8-QD	NPN	BGS-DL25TCN	BGS-DL30CN	BGS-DL70CN	
IVIO-QD	PNP	BGS-DL25TCP	BGS-DL30CP	BGS-DL70CP	


Cable / OD	Transparent type		e (with teach-in)	
Cable / QD	Output	Filled bottle	Empty bottle	
Distance		1.5 meter	4.0 meter	
Cable	NPN	DR-Q150TN	DR-Q400TN	
Cable	PNP	DR-Q150TP	DR-Q400TP	
M8-QD	NPN	DR-Q150TCN	DR-Q400TCN	
IVIO-QD	PNP	DR-Q150TCP	DR-Q400TCP	

Cable / QD	Output	Thri-Beam type (with potentiometer)
Distance		40 meter
Cabla	NPN	DT-4000N
Cable	PNP	DT-4000P
Me OD	NPN	DT-4000CN
M8-QD	PNP	DT-4000CP


Cable / QD	Output	Retro-reflective type (with potentiometer)
Distance	•	5 meter
Coble	NPN	DR-500N
Cable	PNP	DR-500P
Me OD	NPN	DR-500CN
M8-QD	PNP	DR-500CP

Very tight Repeat Accuracy, 0.2 - 0.3 mm for BGS type. Even Thru-beam and Retro types have 0.3mm Repeat Accuracy (\*).

\* = Tested at the middle point of sensing range.



### **CMOS Image Sensor**




#### D

D2S/

Z-L BGS-Z

### Pushbutton Teach with Fine Adjustment


In addition to a Teach button there are also two threshold adjustment buttons. Fine adjustments can be made to the threshold value after Teaching by using the adjustment buttons.





#### Timer functions

The pushbutton teach models of the D series have built-in Timer functions for added flexibility.



Set time is referred as below;


T:	ms							s		
Time	0	10	20		980	990	1	2		10
Display	0	1	2		98	99	01	02		10

- \* 1msec increment for 0-999 msec.
- \* Timer is not available for Manual adjust type sensors
- \* 1sec increment from 1sec to 10 sec.
- \* Dispersion always happens from zero up to +5msec.

  For instance your setting at "10msec" means setting between "10msec and 15msec".
- \* Therefore please make sure to select Normal Operation if you are not in need of timer function.

### Remote Input

The DR-Q and BGS-DL sensors have a Remote Teach input that can be used to remotely set the sensor sensitivity.



### Class 2/Class II IEC, FDA Regulation

The D series conforms to Class 2 (IEC) and Class II (FDA) regulations.

D2SA


Z-L BGS-ZI

# The world's first Laser / BGS with CMOS Image Sensor BGS-DL series

BGS (Background Suppression) type sensors are the most accurate method of diffuse sensing, BGS sensors are able to detect objects without being influenced by either the background or the color of the workpiece. A conventional LED - BGS sensor is accurate, but a Laser CMOS - Laser BGS sensor is able to detect black and/or highly reflective surfaces reliably.


### Great combination; Laser and CMOS Image Sensor shuts out environmental influence.

CMOS Image Sensor system can detect light quantity at each CMOS pixel under well controlled shutter speed, therefore it sharply detects the peak value in the viewfield of sensor while PSD detects mean value of peaks as shown below. Actually it means CMOS Image Sensor System is the ideal way for such objects having reflecting and/or rough surface.



# FGS Function, the best solution for fluttering conveyor.

The BGS-DL series BGS sensors also have a FGS function built-in. The FGS function monitors the surface of the conveyor, if the reflected light from the conveyor is interrupted by the workpiece the output is activated. The FGS sensor is similar to a retroreflective sensor but it operates in a diffuse mode. Therefore the FGS sensor is best for detecting black, reflective, thin, or rough surfaces moving on a conveyor.



## **Specifications**

Model	Laser CMOS BGS (T	each-in type)	Manual adjust Poter	ntiometer type		
Туре	Accurate type	Long distance type	Accurate type	Long distance type		
Cable type	BGS-DL10TN (or DL10TP)	BGS-DL25TN (or DL25TP)	BGS-DL10N (or DL10P)	BGS-DL30N (or DL30P)	BGS-DL70N (or DL70P)	
M8 connector type	BGS-DL10TCN (or DL10TCP)	BGS-DL25TCN (or DL25TCP)	BGS-DL10CN (or DL10CP)	BGS-DL30CN (or DL30CP)	BGS-DL70CN (or DL70CP)	
Sensing distance	40-100mm	100-250mm	40-100mm	100-300mm	100-700mm	
Spot size	φ1mm / 80mm	φ2mm / 200mm	φ3mm / 80mm	φ6mm / 200mm		
Sensitivity adjustment	Push button Teach with fir	e adjust buttons	4-turn potentiometer			
Hysteresis	3% / 80mm	10% / 200mm	5% / 80mm	5% / 200mm	5% / 300mm	
Supply voltage	DC10-30V including 10%	ripple (P-P)				
Power consumption	50mA max (12V), 35mA r	nax (24V)	35mA			
Response time	1.5msec Max(fixed sensitivity)		0.7msec			
Timer	Off delay/On delay/One shot delay		N/A			
	(1msec increment : 0-999msec, 1sec increment for 1-10 sec)					
External input	Remote Teach / Laser OFF selectable		N/A			
Light source	Red Laser Diode 650nm, Max 1mW 300s, Class 2		Red Laser Diode 650nm, I	Max 2mW 6s, Class 2 (Max	3mW for BGS-DL70)	
LED Indicator	Output indicator (orange),	Laser emission (green)				
Digital indicator	7 segment, 3 digit Red LE	D	N/A			
Control output	NPN or PNP open collector	r DC30V 100mA max				
Operating mode	Light/Dark On selectable					
Operating temp / humidity	-10 to 50 °C / 35-85% RH					
Insulation resistance	20M Ohm or more (at 500)	V DC)				
Protection category	IP67					
Conformity	IEC, CE					
Shock resistance	50G (500m/S²), XYZ 3 directions					
Environmental illuminance	Sunlight: 10,000 lux, Incandescent lamp: 3,000 lux max					
Materials	Anti-bacterial ABS (housing	g), PMMA (lens)				

- \*1 Sensing distance with 100mm X 100mm gray 18% paper.
- \*2 Details of hysteresis by color/distance shall be referred in technical chart provided in this catalogue.

Ramco Innovations 800-280-6933 www.optex-ramco.com

D

D2S/

Z-L BGS-71

# Transparent Detection with Laser Light Source is the best solution for Glass/PET DR-Q series

The DR-Q Series offers superior performance in Transparent Object detection. With a 0.7 msec. response time it is ideal for use in high speed bottling applications.

Accurate detection is assured by the use of a Coaxial light source.

The AGC (Automatic Gain Control) circuit will automatically compensate for change.


The AGC (Automatic Gain Control) circuit will automatically compensate for changes in the incoming light level (due to dust/dirt etc.) by adjusting the threshold setting.




oaxial Laser

# AGC (Automatic Gain Control) circuit monitors the incoming light level to maintain reliable operation even in dusty / dirty conditions.


#### **Conventional Retro Reflection sensor**




### DR-Q150T



#### DR-Q series



### DR-Q400T



# Specifications

•					
Model	Transparent type				
Туре	Accurate type : For filled bottle	Long distance type			
Cable type	DR-Q150TN (or Q150TP)	DR-Q400TN (or Q400TP)			
M8 connector type	DR-Q150TCN (or Q150TCP)	DR-Q400TCN (or Q400TCP)			
Sensing distance	1.5 meter	4 meter			
Spot size	15mm / 1.5 meter	20mm / 3.5 meter			
Sensitivity adjustment	Pushbutton teach with fine adjustment button				
Supply voltage	DC10-30V including 10% ripple (P-P)				
Power consumption	35mA				
Response time	0.7 msec				
Timer	Off delay/On delay/One shot delay (1msec increment : 0-999msec, 1sec increment for 1-10 sec)				
Light source	Red Laser Diode 650nm, Max 2mW 4 \mu s, Class 2				
LED Indicator	Output indicator (orange), Laser emission (green)				
Digital indicator	7 segment, 3 digit Red LED				
Control output	NPN or PNP open collector DC30V 100mA max				
Operating mode	Light/Dark On selectable				
Operating temp / humidity	–10 to 50 °C / 35-95% RH				
Insulation resistance	20M Ohm or more (at 500V DC)				
Protection category	IP67				
Conformity	IEC, CE				
Shock resistance	50G (500m/S²) , XYZ 3 directions				
Environmental illuminance	Sunlight: 10,000 lux, Incandescent lamp: 3,000 lux max				
Materials	Anti-bacterial ABS (housing), PMMA (lens)				

<sup>\*1</sup> Sensing distance taken with P250F reflector

D

D2SA

Z-L BGS-ZI The most powerful Thru-beam and Retro-reflective type sensors available with a Laser Light Source.

DT series (Laser thru-beam) / DR series (Laser retro-reflective)

The D Series Laser Sensors offer a long sensing distance in conventional Thru-beam and Retro-reflective sensors.


The Co-axial Laser light source gives extremely tight alignment to the target.

Alignment of the sensor is easy thanks to the bright projected laser spot.


The DT Series Thru-beam detects at 100 meters distance while the actual Margin Spec is set at 40 meters.




Coaxial Laser

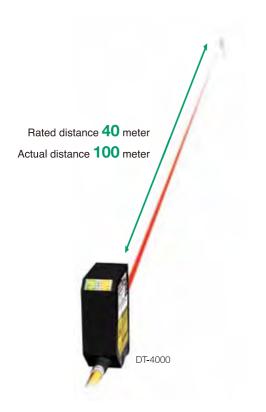

### DT-4000

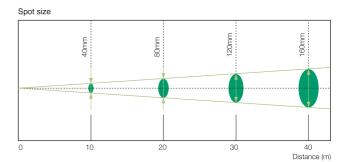

### DR-500




# **Specifications**

•					
Model	Potentiometer adjustment type				
Туре	Thru-Beam	Retro reflective			
Cable type	DT-4000N (or 4000P)	DR-500N (or 500P)			
M8 connector type	DT-4000CN (or 4000CP)	DR-500CN (or 500CP)			
Sensing distance	40 meter	5 meter			
Spot size	15mm/5 meter	20mm/3.5 meter			
Sensitivity adjustment	1-turn potentiometer				
Supply voltage	DC10-30V including 10% ripple (P-P)				
Power consumption	40mA 30 mA				
Response time	0.5msec				
Light source	Red Laser Diode 650nm, Max 2mW 4s, Class 2				
LED Indicator	Output indicator (orange), Laser emission (green)				
Digital indicator	N/A				
Control output	NPN or PNP open collector DC30V 100mA max				
Operating mode	Light/Dark On switchable				
Operating temp / humidity	-10 to 50 °C / 35-95% RH				
Insulation resistance	20M Ohm or more (at 500V DC)				
Protection category	IP67				
Conformity	IEC, CE				
Shock resistance	50G (500m/S²) , XYZ 3 directions				
Environmental illuminance	Sunlight: 10,000 lux, Incandescent lamp: 3,000 lux max				
Materials	Anti-bacterial ABS (housing), PMMA (lens)				

<sup>\*1</sup> Sensing distance taken with P250F reflector


# Circuit diagram

#### DR-Q / BGS-DL series




### **Dimensions**


#### Cable type sensor




#### Connector type sensor




# Cable type sensor with bracket




# Connector type sensor with bracket





(Unit : mm)








Z-L 3GS-ZI

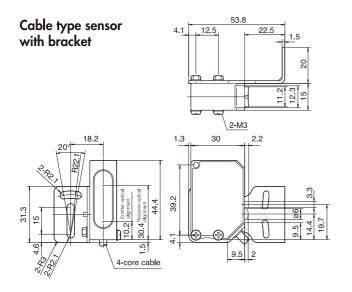










PL10F


Sensing distance by reflectors

	P250F	PL20F	PL10F
DR-Q400T	4.0	2.8	1.0
DR-Q150T	1.5	1.0	0.5
DR-500	5.0	3.5	1.2


(Unit : meter)









#### **Mounting Bracket**




### JCN-S: M8 Straight type



### JCN-L: M8 L-shape type





D

D2SA

Z-L BGS-Z

# **Options**

#### P250F : Standard reflector



#### PL20F : Small reflector



#### PL10F : Miniature reflector



#### MP45: Fine Positioning reflector



#### MP225 : Large reflector



JCN-S: M8 Straight type




JCN-L: M8 L-shape type




D2SA

Z-L 3GS-71

# Reference (typical)

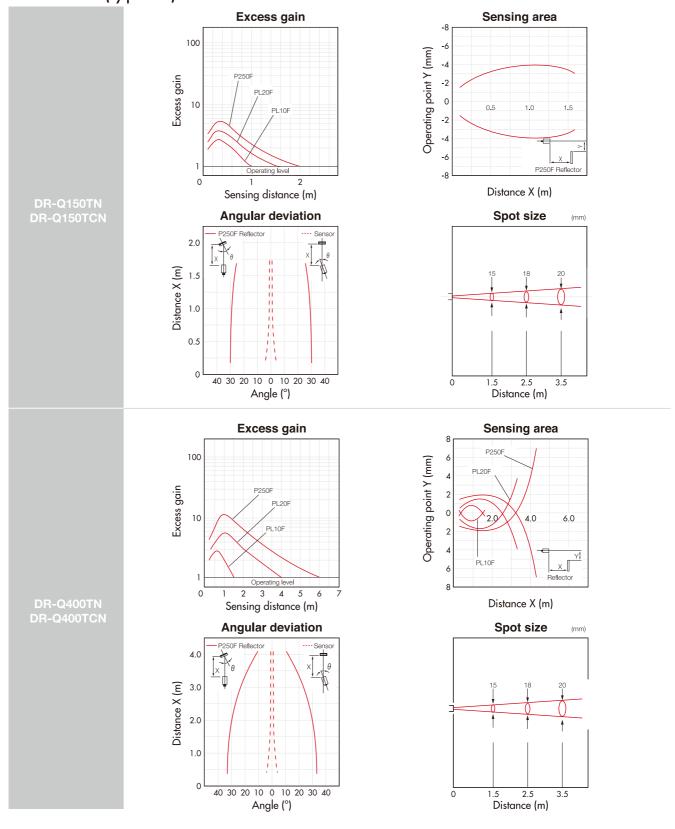

# Reference (typical)

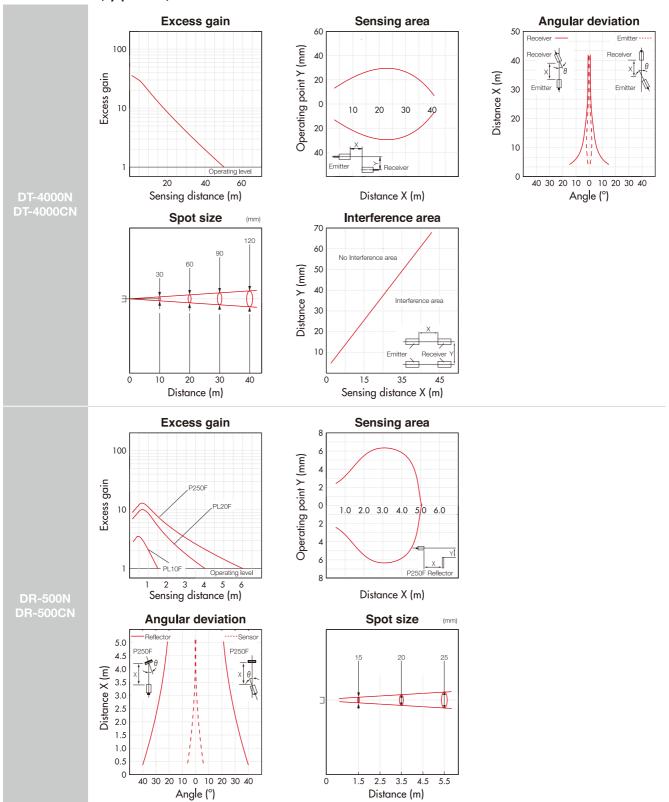

D

D2SA

Z-L BGS-7

# Reference (typical)

