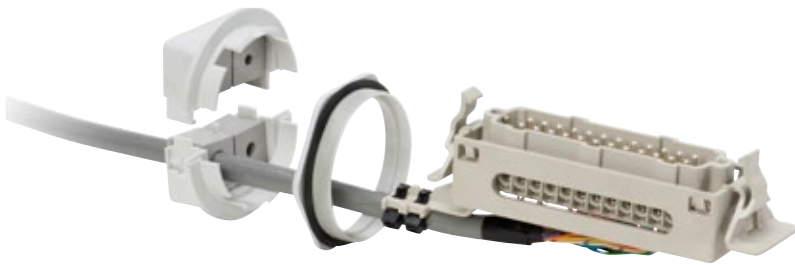


KVT-SNAP

Split Pluggable Cord Grips


IP54

1.12

Description	Type	Order No.	Grommets small large	Thread Thread length	PU
	KVT-SNAP 32	45130	1 -	M32 × 1.5 Length: 11 mm / 0.443 "	10
	KVT-SNAP 40	45134	1 -	M40 × 1.5 Length: 11 mm / 0.443 "	10
	KVT-SNAP 63 4 + KGM 63	45152	4 -	M63 × 1.5 Length: 11 mm / 0.443 "	5
	KVT-SNAP 63 1 + KGM 63	45154	- 1	M63 × 1.5 Length: 11 mm / 0.443 "	5
	KGM 32	■ 52275 ■ 52285	PA	M32 × 1.5	10
	KGM 40	■ 52276 ■ 52286	PA	M40 × 1.5	10
	KGM 63	■ 52278 ■ 52288	PA	M63 × 1.5	5

* Only valid for gray product types

Product Description

KVT is a circular split frame for quick and easy installation of cables with connectors or complete cable harnesses.

By using the model KVT-SNAP, cables can be routed through thick walls (> 5 mm) e.g. into cast junction boxes without the use of tools. A sealing ring is included in the shipment.

Assembly

- The snap ring is screwed into metric thread or tapped into the cut-out (it can also be fastened with a locknut, which is included in the shipment of KVT-SNAP 63)
- Once the snap ring is affixed to the housing the equipped KVT is simply pushed into it. Fast and easy installation!

Specifications

Material	Polycarbonate (PC)
Color	gray (similar RAL 7035)
Flame class	UL94-Vo
IP Rating	<input type="checkbox"/> IP54, with gasket and correct selection of the cable grommets (certified acc. to EN 60529)
Operating temperature	- 30°C to + 100°C (static) - 22°F to + 212°F (static)
Properties	Halogen-free, silicone-free
Cut-out dimension	Metric cut-outs

Accessories

Cable grommets	48 - 52
KVT-EMC Brackets	141
KGM Locknuts	188 - 189
ST Plugs	53